

Minimizing Weighted Sum Download Time for One-to-Many File Transfer in Peer-to-Peer Networks

Bike Xie, Mihaela van der Schaar and Richard D. Wesel

Department of Electrical Engineering, University of California, Los Angeles,
CA 90095-1594

Email: xbk@ee.ucla.edu, mihaela@ee.ucla.edu, wesel@ee.ucla.edu

Abstract

This paper considers the problem of transferring a file from one source node to multiple receivers in a peer-to-peer (P2P) network. The objective is to minimize the weighted sum download time (WSDT) for the one-to-many file transfer. Previous work has shown that, given an order at which the receivers finish downloading, the minimum WSD can be solved in polynomial time by convex optimization, and can be achieved by linear network coding, assuming that node uplinks are the only bottleneck in the network. This paper, however, considers heterogeneous peers with both uplink and downlink bandwidth constraints specified. The static scenario is a file-transfer scheme in which the network resource allocation remains static until all receivers finish downloading. This paper first shows that the static scenario may be optimized in polynomial time by convex optimization, and the associated optimal static WSD can be achieved by linear network coding. This paper then presented a lower bound to the minimum WSDT that is easily computed and turns out to be tight across a wide range of parameterizations of the problem. This paper also proposes a static routing-based scheme and a static rateless-coding-based scheme which have almost-optimal empirical performances. The dynamic scenario is a file-transfer scheme which can re-allocate the network resource during the file transfer. This paper proposes a dynamic rateless-coding-based scheme, which provides significantly smaller WSDT than the optimal static scenario does.

Keywords

P2P network, network coding, rateless code, routing, extended mutualcast.

I. INTRODUCTION

P2P applications (e.g, [1], [2], [3], [4]) are increasingly popular and represent the majority of the traffic currently transmitted over the Internet. A unique feature of P2P networks is their flexible and distributed nature, where each peer can act as both a server and a client [5]. Hence, P2P networks provide a cost-effective and easily deployable framework for disseminating large files without relying on a centralized infrastructure [6]. These features

of P2P networks have made them popular for a variety of broadcasting and file-distribution applications [6] [7] [8] [9] [10] [11] [12].

Specifically, chunk-based and data-driven P2P broadcasting systems such as CoolStreaming [7] and Chainsaw [8] have been developed, which adopt pull-based techniques [7], [8]. In these P2P systems, the peers possess several chunks and these chunks are shared by peers that are interested in the same content. An important problem in such P2P systems is how to transmit the chunks to the various peers and create reliable and efficient connections between peers. For this, various approaches have been proposed including tree-based and data-driven approaches (e.g. [10] [13] [14] [15] [16] [17] [18]).

Besides these practical approaches, some research has begun to analyze P2P networks from a theoretic perspective to quantify the achievable performance. The performance, scalability and robustness of P2P networks using network coding are studied in [19] [20]. In these investigations, each peer in a P2P network randomly chooses several peers including the server as its parents, and also transmits to its children a random linear combination of all packets the peer has received. Random linear network coding [21] [22] [23], working as a perfect chunk selection algorithm, makes elegant theoretical analysis possible. Some other research investigates the steady-state behavior of P2P networks with homogenous peers by using fluid models [24] [25] [26].

In a P2P file transfer application (e.g, BitTorrent [1], Overcast [12]), the key performance metric from an end-user's point of view is the download time, i.e., the time it takes for an end-user to download the file. In [9], Li, Chou, and Zhang explore the problem of delivering the file to all receivers in minimum amount of time (equivalently, minimizing the maximum download time to the receivers) assuming node uplinks are the only bottleneck in the network. They introduce a routing-based scheme, referred to as Mutualcast, which minimizes the maximum download time to all receivers with or without helpers.

This paper also focuses on file transfer applications in which peers are only interested in

the file at full fidelity, even if it means that the file does not become available to all peers at the same time. In particular, this paper considers the problem of minimizing weighted sum download time (WSDT) for one-to-many file transfer in a peer-to-peer (P2P) network. Consider a source node s that wants to broadcast a file of size B to a set of N receivers $i \in \{1, 2, \dots, N\}$ in a P2P network. Our model assumes that the source uplink bandwidth constraint U_s , the peer uplink bandwidth constraints U_i , and the peer downlink bandwidth constraints D_i are the only bottlenecks in the network. Limited only by these constraints, every peer can connect to every other peer through routing in the overlay network.

In order to understand the fundamental performance limit for one-to-many file transfer in P2P networks, it is assumed that all nodes are cooperative, and a centralized algorithm provides the file-transfer scenario with the full knowledge of the P2P network including the source node's uplink capacity, and the weights, downlink capacities, and uplink capacities of peers. The cooperative assumption holds in many practical applications, for example, in closed content distribution systems where the programs are managed by a single authority.

II. MAIN CONTRIBUTION

The general problem of minimizing WSDT divides into an exhaustive set of cases according to three attributes. The first attribute is whether the allocation of network resources is static or dynamic. In the static scenario, the network resource allocation remains unchanged from the beginning of the file transfer until all receivers finish downloading. The dynamic scenario allows the network resource allocation to change as often as desired during the file transfer.

The second attribute is whether downlink bandwidth constraints are considered to be unlimited (i.e. $D_i = \infty$) or not (i.e. $D_i \leq \infty$). Most research in P2P considers the download bandwidth constraints to be unlimited because the uplink capacity is often several times smaller than the downlink capacity for typical residential connections (e.g., DSL and Cable). However, consideration of downlink bandwidth constraints can be important. The downlink capacity can still be exceeded when a peer downloads from many other peers simultaneously,

as in the routing-based scheme proposed in [27].

The third attribute is whether we consider the special case of sum download time (i.e. $W_i = 1$ for all i) or the general case of weighted sum download time which allows any values of the weights W_i .

With these cases in mind, here is an overview of the results presented in this paper. For the static scenario that considers download bandwidth constraints $D_i \leq \infty$ and allows any values of W_i , Section III uses a time-expanded graph and linear network coding to show that the minimum WSDT and the corresponding allocation of network resources may be found in polynomial time by solving a convex optimization problem. We also present a lower bound on minimum WSDT that is easily computed and turns out to be tight across a wide range of parameterizations of the problem.

While the minimum WSDT for the static scenario may be found in polynomial time using the approach of Section III, that approach is sufficiently computationally intensive that Sections IV and V provide lower complexity alternatives. In some cases, the lower complexity approaches are exactly optimal. For the remaining cases, the lower bound of Section III shows that their performance is indistinguishable from the lower bound and hence closely approach optimality across a wide range of parameterizations.

Sections IV and V build on the foundation of the Mutualcast algorithm [9]. Mutualcast is a static rate allocation algorithm designed to minimize the maximum download time to all peers in the case where $D_i = \infty$. Section III concludes by showing that Mutualcast achieves that section's lower bound when $W_i = 1$ for all i and therefore minimizes sum download time as well as maximum download time.

Inspired by this result, Section IV proposes a generalization of this algorithm, Extended Mutualcast, that minimizes sum download time even when the download bandwidth constraints D_i are finite and distinct from each other. When uplink bandwidth resources are plentiful, Extended Mutualcast also minimizes weighted sum download time regardless of

weights because each receiver is downloading content as quickly as possible given its download bandwidth constraint and the upload bandwidth constraint of the source.

It is notable that Mutualcast and Extended Mutualcast achieve their optimal results while utilizing only depth-1 and depth-2 trees. Inspired by this fact and the technique of rateless coding, Section V attacks the general problem of minimizing weighted sum download time (WSDT) by proposing a convex optimization approach that assumes only trees of depth one or two. Then, Section V proposes a simple water-filling approach using only depth-1 and depth-2 trees. While the optimality of this approach is not proven, Section V-E shows that its performance matches that of the lower bound of III for a wide variety of parameterizations. Thus this water-filling approach provides a simple algorithm that empirically achieves the lower bound on WSDT for all cases of the static scenario across a wide range of parameterizations.

Turning our attention to the dynamic scenario, Wu et al. [27] demonstrate that given an order in which the receivers finish downloading, the dynamic allocation (neglecting downlink bandwidth constraints) that minimizes WSDT can be obtained in polynomial time by convex optimization and can be achieved through linear network coding. They also propose a routing-based scheme which has almost-optimal empirical performance and demonstrate how to significantly reduce the sum download time at the expense of a slight increase in the maximum download time.

Dynamic schemes can reduce the minimum sum download time to approximately half that of the static case, at least when downlink capacities are considered to be infinite [27]. Essentially, [27] shows that to optimize WSDT the network resource allocation should remain constant during any “epoch”, a period of time between when one receiver finishes downloading and another finishes downloading. Thus, one optimal solution for the dynamic scenario is “piecewise static”. However, [27] leaves the proper selection of the ordering as an open problem and does not address the finite downlink capacities $D_i < \infty$ or the general case of

weighted sum download time which allows any values of the weights W_i .

Section VI provides a practical solution for the dynamic scenario. Specifically, it provides an approach the ordering problem left open by [27] by reformulating the problem as that of determining the weights that should be assigned during each static epoch so as to produce the piecewise static solution that minimizes the WSTD (according to the original weights). This approach handles both finite downlink capacities $D_i < \infty$ and the general case of weighted sum download time which allows any values of the weights W_i . A key result of this section is that, regardless of how the overall weights W_i are set, the “piecewise static” solution may be obtained by finding the appropriate weights for each epoch and solving the static problem for that epoch. Furthermore, during any epoch the appropriate weights of all peers are either 1 or zero with the exception of at most one “transitional” peer whose weight can be anywhere between zero and 1. Neglecting the “transitional” node, the ordering problem becomes approximately one of choosing which peers should be served during each epoch. Having resolved the ordering problem in this way, the simple water-filling approach of Section V provides the rate allocations for the source and for each peer during each of the piecewise-static epochs. Thus this section provides a complete solution for the dynamic scenario. Because the selection of the ordering and the rate allocation are both close to optimal, we conjecture that the overall performance of this solution is close to optimal across a wide range of parameterizations.

Section VIII delivers the conclusions of this paper.

III. CONVEX OPTIMIZATION OF WSTD IN THE STATIC CASE

This section considers a static P2P network in which the source node with uplink bandwidth U_s seeks to distribute a file of size B so as to minimize the weighted sum of download times given a static allocation of resources. The static scenario assumption also indicates that no peer leaves or joins during the file transfer. There are N peers who want to download the file that the source node has. Each peer has weight W_i , downlink capacity D_i and

uplink capacity U_i , for $i = 1, 2, \dots, N$. It is reasonable to assume that $D_i \geq U_i$ for each $i = 1, \dots, N$ since it holds for typical residential connections (e.g., Fiber, DSL and Cable). In case of $D_i < U_i$ for some i , we just use peer i 's part of the uplink capacity which equals to its downlink capacity and leave the rest of the uplink capacity unused.

The uplink and downlink capacities of each peer are usually determined at the application layer instead of the physical layer, because an Internet user can have several applications that share the physical downlink and uplink capacities. The peer weights depend on the applications. For broadcast applications such as CoolStreaming [7] and Overcast [12] in which all peers in the P2P network are interested in the same content, all peer weights in the content distribution system can be set to 1. In multicast applications such as "Tribler" [28] peers called helpers, who are not interested in any particular content, store part of the content and share it with other peers. Assign weight zero to helpers, and weight 1 to receivers. In some applications, P2P systems partition peers into several classes and assign different weights to peers in different classes.

Denote the transmission rate from the source node to peer j as $r_{s \rightarrow j}$ and the transmission rate from peer i to peer j as $r_{i \rightarrow j}$. The total download rate of peer j , denoted as d_j , is the summation of $r_{s \rightarrow j}$ and $r_{i \rightarrow j}$ for all $i \neq j$. Since the total download rate is constrained by the downlink capacity, we have

$$d_j = r_{s \rightarrow j} + \sum_{i \neq j} r_{i \rightarrow j} \leq D_j, \forall j = 1, \dots, N. \quad (1)$$

As a notational convenience, we also denote $r_{j \rightarrow j}$ as the transmission rate from the source node to peer j so that

$$d_j = \sum_{i=1}^N r_{i \rightarrow j} \leq D_j, \forall j = 1, \dots, N. \quad (2)$$

The total upload rate, denoted as u_j , is constrained by the uplink capacity. Hence, we also have $u_j = \sum_{i \neq j} r_{j \rightarrow i} \leq U_j$ for all $j = 1, \dots, N$.

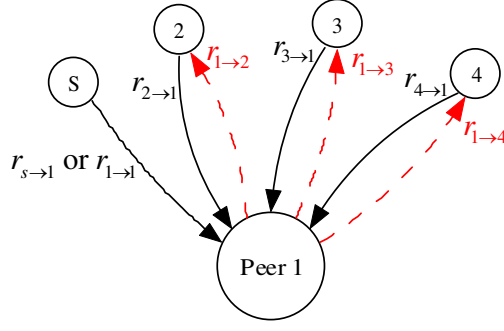


Fig. 1

THE PEER MODEL

One example of the peer model is shown in Fig. 1. The downlink capacity and uplink capacity of peer 1 are D_1 and U_1 respectively. Thus, the total download rate $r_{s \rightarrow 1} + \sum_{i=2}^4 r_{i \rightarrow 1} = \sum_{i=1}^4 r_{i \rightarrow 1}$ has to be less than or equal to D_1 , and the total upload rate $\sum_{i=2}^4 r_{1 \rightarrow i}$ has to be less than or equal to U_1 .

A. The Time-Expanded Graph

As one of the key contributions of [27], Wu *et al.* used a time-expanded graph to show how the dynamic scenario decomposes into epochs. This section applies the time-expanded graph approach provided in [27] to the *static* case.

To obtain the time-expanded graph for a P2P network with N peers, we need to divide the time into N *epochs* according to the finishing times of the peers. One peer finishes downloading at the end of each epoch so that the number of epochs is always equal to the number of peers. Let Δt_i denote the duration of the i -th epoch. Hence, i receivers finish downloading by time $t_i = \sum_{k=1}^i \Delta t_k$. If peers i and $i + 1$ finish downloading at the same time, $\Delta t_{i+1} = 0$.

Each vertex in the original graph G corresponds to N vertices, one for each epoch, in the time-expanded graph $G^{(N)}$ as follows: We begin with the original P2P graph G with node set $V = \{s, 1, \dots, N\}$ and allowed edge set E . For each $v \in V$ and each $n \in \{1, \dots, N\}$, $G^{(N)}$

includes a vertex $v^{(n)}$ corresponding to the associated physical node v in the n -th epoch. For each $e \in E$ going from u to v and each $n \in \{1, \dots, N\}$, $G^{(N)}$ includes an edge $e^{(n)}$ going from $u^{(n)}$ to $v^{(n)}$ corresponding to the transmission from u to v during the n -th epoch.

The subgraph $G^{(n)} = (V^{(n)}, E^{(n)})$ for $n = 1, \dots, N$ characterizes the network resource allocation in the n -th epoch. To describe a rate allocation in the original graph G , edges are typically labeled with the *rate* of information flow. However, since each epoch in the time-expanded graph $G^{(N)}$ has a specified duration, each of the N edges in the time-expanded graph corresponding to an edge in G is labeled with the total amount of information flow across the edge during its epoch. This is the product of the flow rate labeling that edge in the original graph G and the duration of the epoch.

The time-expanded graph also includes memory edges. For each $v \in V$ and each $n \in \{1, \dots, N-1\}$, there is an edge with infinite capacity from $v^{(n)}$ to $v^{(n+1)}$. These memory edges reflect the accumulation of received information by node v over time.

As just described, the time-expanded graph not only describes the network topology, but also characterizes the network resource allocation over time until all peers finish downloading in a P2P network. As shown in [27] by Wu et al., even in the dynamic scenario the network resource allocation can remain static throughout each epoch without loss of optimality. In this section, we apply the time-expanded graph to the static scenario in which the rate allocation remains fixed for the entire file transfer.

As an example, consider the following scenario. A P2P network contains a source node seeking to disseminate a file of unit size ($B = 1$). Its upload capacity is $U_S = 2$. There are three peers $\{1, 2, 3\}$ with upload capacities $U_1 = U_2 = U_3 = 1$ and download capacities $D_1 = D_2 = D_3 = \infty$.

Fig. 2 gives one possible static rate allocation, showing the allocated rate for each edge of the original P2P graph G . (Edges with zero allocated rate are not shown.) The source node transmits with a rate of 1 to peer 1 and with rate 1/2 to peers 3 and 4. Peer 1 transmits

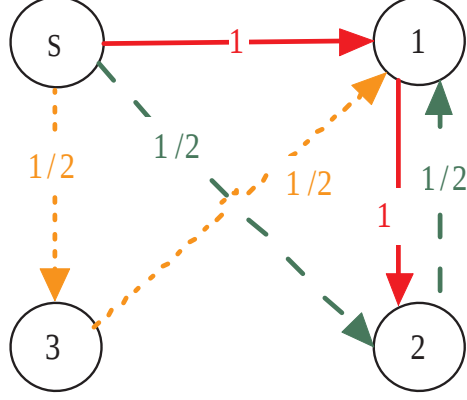


Fig. 2

AN EXAMPLE P2P GRAPH G . EDGES ARE LABELED WITH ONE POSSIBLE RATE ALLOCATION $r_{i \rightarrow j}$.

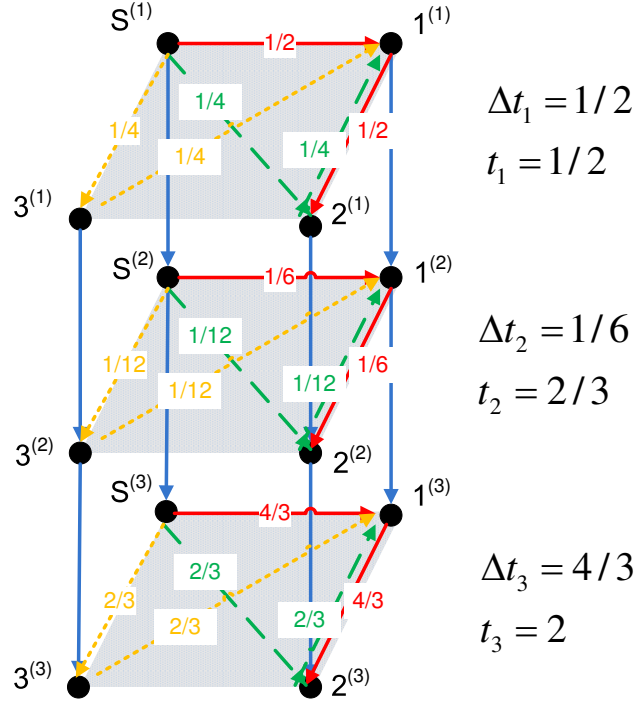


Fig. 3

THE TIME-EXPANDED $G^{(3)}$ FOR THE P2P GRAPH G SHOWN IN FIG. 2. EDGES ARE LABELED WITH THE TOTAL INFORMATION FLOW ALONG THE EDGE DURING THE EPOCH. THIS IS THE PRODUCT OF THE RATE ALLOCATION ALONG THE EDGE (FROM THE GRAPH IN FIG. 2) AND THE DURATION OF THE EPOCH. EDGES WITH ZERO FLOW ARE NOT SHOWN.

with rate 1 to peer 2 but does not transmit to any other peers. Peers 2 and 3 transmit with rate $1/2$ to Peer 1, but do not transmit to any other peers.

Fig. 3 shows the time-expanded graph induced by the static rate allocation shown in Fig. 2. Because there are three peers, this time-expanded graph has 3 epochs. The peers are numbered in the order they finish downloading; peer 1 finishes first followed by peer 2 and then peer 3. The first epoch lasts $\Delta t_1 = 1/2$ time units, the second epoch lasts $\Delta t_2 = 1/6$ time units, and the third epoch lasts $\Delta t_3 = 4/3$ time units.

Peer 1 finishes first because it sees the full upload capacity of the source. As shown in Fig. 2 it sees rate 1 directly from the source. The other half of the source upload capacity is relayed to peer 1 by peers 2 and 3 immediately after they receive it. Hence peer 1 receives information with an overall rate of $r_1 = 2$ and finishes downloading the entire file, which has size $B = 1$ at time $t_1 = 1/2$. As a result, the duration of the first epoch is $\Delta t_1 = 1/2$.

Peer 2 sees rate $1/2$ directly from the source and rate 1 relayed to peer 2 by peer 1. Hence it sees an overall upload capacity of $r_2 = 3/2$ and finishes downloading the entire file at time $t_2 = 2/3$. The duration of the second epoch can be computed as $t_2 - t_1 = 1/6$.

Because it receives no help from the other two peers, peer 3 sees an overall upload rate of only $r_3 = 1/2$, which it receives directly from the source. It finishes downloading the entire file at time $t_3 = 2$. The duration of the third epoch can be computed as $t_3 - t_2 = 4/3$.

The sum of the download times for the example of Figs. 2 and 3 is $1/2 + 2/3 + 2 = 3 \frac{1}{6}$. Now let's consider an example that minimizes the sum of the download times and in which peers finish at the same time.

Fig. 4 shows the rate allocation that achieves the minimum possible sum of download times for a static allocation in this scenario, which turns out to be $1 \frac{4}{5}$. The allocation shown in Fig. 4 is perfectly symmetric. Each peer receives rate $2/3$ directly from the source and rate $1/2$ from each of the two other peers. Each peer receives an overall rate of $5/3$. Hence all three peers finish downloading simultaneously at $t = 3/5$ and the second and third

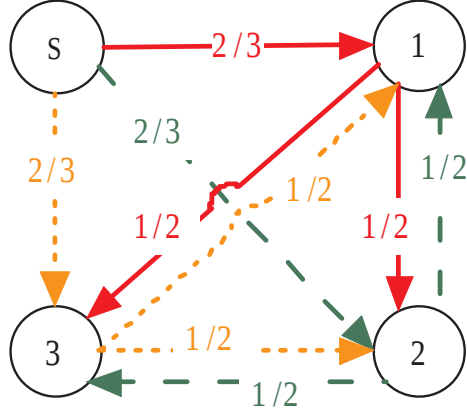


Fig. 4

AN EXAMPLE P2P GRAPH G . EDGES ARE LABELED WITH THE RATE ALLOCATION $r_{i \rightarrow j}$ THAT MINIMIZES THE SUM OF THE DOWNLOAD TIMES.

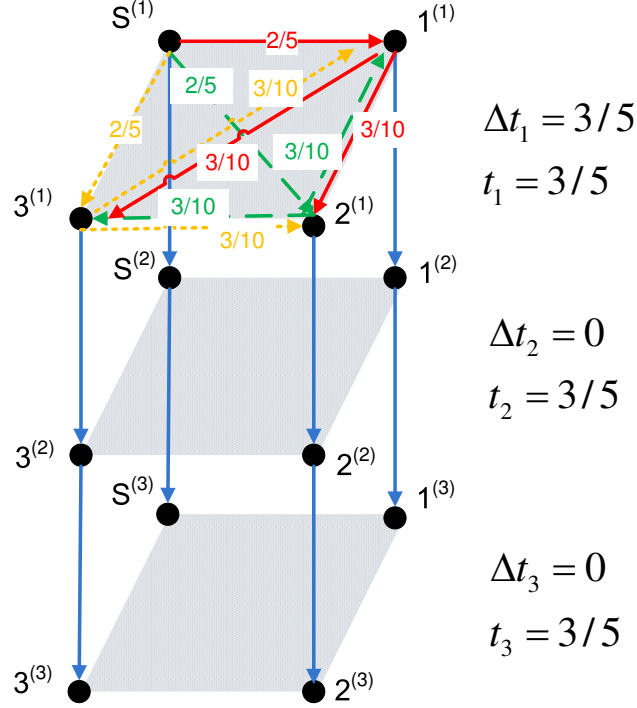


Fig. 5

THE TIME-EXPANDED $G^{(3)}$ FOR THE P2P GRAPH G SHOWN IN FIG. 4. EDGES ARE LABELED WITH THE TOTAL INFORMATION FLOW ALONG THE EDGE DURING THE EPOCH. THIS IS THE PRODUCT OF THE RATE ALLOCATION ALONG THE EDGE (FROM THE GRAPH IN FIG. 4) AND THE DURATION OF THE EPOCH. EDGES WITH ZERO FLOW ARE NOT SHOWN.

epochs have zero duration.

B. Transmission Flow Vectors and a Basic Network Coding Result

In Section III-A there was a tacit assumption that all of the information received by a peer is *useful*. For example, we assumed that the information relayed from peer 2 to peer 1 did not repeat information sent from the source to peer 1. In the examples of Section III-A, one can quickly construct simple protocols that ensure that no critical flows are redundant. In this subsection, we review a general result that uses network coding theory to show that there is always a way to ensure that no critical flows are redundant.

Consider a general graph $G = (V, E)$, which could be either a rate-allocation graph G such as Figs. 2 or 4 or a time-expanded graph such as $G^{(3)}$ described in Figs. 3 and 5. Denote $c(e)$ as the capacity of the edge $e \in E$. A transmission flow from the source node s to a destination node i is a nonnegative vector $\mathbf{f}$ of length $|E|$ satisfying the flow conservation constraint: $\text{excess}_v(\mathbf{f}) = 0, \forall v \in V \setminus \{s, i\}$, where

$$\text{excess}_v(\mathbf{f}) = \sum_{e \in \text{In}(v)} f(e) - \sum_{e \in \text{Out}(v)} f(e). \quad (3)$$

The total flow supported by $\mathbf{f}$ is $\sum_{e \in \text{Out}(s)} f(e)$. This “flow” could be a flow *rate* with units of bits per unit time if we are considering a rate allocation graph such as Fig. 2 or it could be a total flow with units of bits or packets or files if we are considering a time-expanded graph such as Fig. 3.

As an example, the flow vector $\mathbf{f}$ describing the flow in Fig. 3 from $S^{(1)}$ (the source in the first epoch) to destination node $2^{(2)}$ (peer 2 in the second epoch, when peer 2 finishes downloading) has the nonzero elements $f(e)$ shown in Table I. Examining Table I verifies that the flow conservation constraint (3) is satisfied and that the total flow supported is equal to 1 file.

TABLE I

TABLE SHOWING NONZERO ELEMENTS $f(e)$ FOR THE FLOW VECTOR $\mathbf{f}$ FROM $S^{(1)}$ TO $2^{(2)}$ IN FIG. 3.

e	$f(e)$
$S^{(1)} \rightarrow 2^{(1)}$	$1/4$
$S^{(1)} \rightarrow 1^{(1)}$	$1/2$
$1^{(1)} \rightarrow 2^{(1)}$	$1/2$
$2^{(1)} \rightarrow 2^{(2)}$	$3/4$
$S^{(1)} \rightarrow S^{(2)}$	$1/4$
$S^{(2)} \rightarrow 2^{(2)}$	$1/12$
$S^{(2)} \rightarrow 1^{(2)}$	$1/6$
$1^{(2)} \rightarrow 2^{(2)}$	$1/6$

The following lemma states that a given fixed flow (or flow rate) can be achieved from the source to all destinations as long as there is a feasible flow vector supporting the desired flow from the source to each destination. i.e. We can achieve this flow to all destinations with network coding without worrying about possible interactions of the various flows..

Lemma 1: (Network Coding for Multicasting [21] [22]) In a directed graph $G = (V, E)$ with edge capacity specified by a vector $\mathbf{c}$, a multicast session from the source node s to a set of receivers $i \in \{1, \dots, N\}$ can achieve the same flow r for each $i \in \{1, \dots, N\}$ if and only if there exists a set of flows $\{\mathbf{f}_i\}$ such that

$$\mathbf{c} \geq \max_i \mathbf{f}_i \quad (4)$$

where $\mathbf{f}_i$ is a flow from s to i with flow r . Furthermore, if (4) holds, there exists a linear network coding solution.

C. A Convex Optimization

Given an order in which the peers will finish downloading, say peer i finishes at the end of the k_i -th epoch, applying Lemma 1 to the time-expanded graph $G^{(N)}$ with the set of destination nodes $i \in \{1, \dots, N\}$ gives a characterization of all feasible downloading times,

as concluded in the following lemma.

Lemma 2: (Feasible Downloading Times with Given Order [27]) Consider a P2P network in which node $D_i = \infty$. Given an order in which the nodes will finish downloading a file with size B , say node i finishes at epoch k_i , a set of epoch durations Δt_i is feasible if and only if the following system of linear inequalities has a feasible solution:

$$\Delta t_i \geq 0, \quad i = 1, \dots, N, \quad (5)$$

$$\mathbf{g} \geq \mathbf{f}_i, \quad i = 1, \dots, N, \quad (6)$$

$$\sum_{v: u^{(i)} \rightarrow v^{(i)}} g_{u^{(i)} \rightarrow v^{(i)}} \leq c_u \Delta t_i, \quad \forall u \in V, i = 1, \dots, N, \quad (7)$$

where c_u is the uplink capacity of peer u , and $\mathbf{f}_i$ is a flow from first-epoch source node $s^{(1)}$ to node i 's termination-epoch node $i^{(k_i)}$ with flow rate B .

As an example, the epoch durations of Fig. 3 are feasible because each of the flow vectors (one example was given in Table I) satisfy the feasibility constraints of Lemma 2.

Let t_j denote the download time to peer j for $j = 1, \dots, N$. Given a static network resource allocation $r_{i \rightarrow j}$, ($i, j \in \{1, \dots, N\}$) as shown for example in Fig. 2, the maximum flow to peer j , denoted as r_j , is equal to the minimum cut between source node s and peer j in the rate-allocation graph (i.e. a graph such as Fig. 2, not the time-expanded graph). This follows from the Max-Flow-Min-Cut Theorem. Hence, $t_j \geq \frac{B}{r_j}, \forall j$.

From applying network coding results such as Lemma 1 to the rate allocation graph alone, we cannot conclude much about feasible download times since Lemma 1 addresses only the feasibility of the same flow to all destinations. However, by applying Lemma 1 to the *time-expanded graph* we can show that $t_j = \frac{B}{r_j}$ can be achieved simultaneously for all $j = 1, \dots, N$. Lemma 3 below states this result.

Lemma 3: Given a static network resource allocation $r_{i \rightarrow j}$, ($i, j = 1, \dots, N$), for a P2P network, the only Pareto optimal (smallest) download time vector is $t_j = \frac{B}{r_j}$ for $j = 1, \dots, N$,

where r_j is the minimum cut from the source node s to peer j .

Proof: It has been shown that $t_j \geq \frac{B}{r_j}$ for $j = 1, \dots, N$. Hence, it is sufficient to show that $t_j = \frac{B}{r_j}$ for $j = 1, \dots, N$ is achievable. Without loss of generality, assume that $r_1 \geq r_2 \geq \dots \geq r_N > 0$. Construct a static scheme (i.e. a time-expanded graph $G^{(N)}$) as follows:

- (1) $\Delta t_i = \frac{B}{r_i} - \frac{B}{r_{i-1}}$, where $r_0 \triangleq \infty$;
- (2) Flow capacity of edge $i^{(k)} \rightarrow j^{(k)}$ is $r_{i \rightarrow j} \Delta t_k$ for $1 \leq i \neq j \leq N$ and $k = 1, \dots, N$;
- (3) Flow capacity of edge $s^{(k)} \rightarrow j^{(k)}$ is $r_{s \rightarrow j} \Delta t_k$ for $j, k = 1, \dots, N$;
- (4) Flow capacity of edge $j^{(k)} \rightarrow j^{(k+1)}$ is infinity for $j = 1, \dots, N$ and $k = 1, \dots, N-1$;
- (5) The destination nodes in the time-expanded graph are node $i^{(i)}$ for $i = 1, \dots, N$. In other words, peer i finishes at the end of i -th epoch.

According to the constructions (1) and (5), the download time to peer i is $t_i = \sum_{k=1}^i \Delta t_k = \frac{B}{r_i}$. According to the constructions (2) and (3), in the subgraph $G^{(k)}$, the maximum flow from $s^{(k)}$ to $i^{(k)}$ is equal to $r_i \Delta t_k$ for all $i, k = 1, \dots, N$. Therefore, in this time-expanded graph $G^{(N)}$, the maximum flow from source node s to node $i^{(i)}$ is greater than or equal to

$$\sum_{k=1}^i r_i \Delta t_k = B.$$

Therefore, by Lemma 1 and Lemma 2, there exists a linear network coding solution to multicast a file with size B from the source node s to peer i within download time $t_i = \frac{B}{r_i}$ for all $i = 1, \dots, N$. ■

The maximum flow r_i can be found by solving a linear optimization. Specifically, a set of flow rates $\{r_i\}_{i=1}^N$ is feasible if and only if there exists a solution to the following system of

linear inequalities:

$$r_{i \rightarrow j} \geq 0, \quad \forall i, j = 1, \dots, N; \quad (8)$$

$$\sum_{i=1}^N r_{i \rightarrow i} \leq U_s; \quad (\text{recall that } r_{i \rightarrow i} \triangleq r_{s \rightarrow i}) \quad (9)$$

$$\sum_{j=1, j \neq i}^N r_{i \rightarrow j} \leq U_i, \quad \forall i = 1, \dots, N; \quad (10)$$

$$\sum_{j=1}^N r_{j \rightarrow i} \leq D_i, \quad \forall i = 1, \dots, N; \quad (11)$$

$$0 \leq f_{i \rightarrow j}^{(k)} \leq r_{i \rightarrow j}, \quad \forall i, j, k = 1, \dots, N; \quad (12)$$

$$f_{k \rightarrow j}^{(k)} = 0, \quad \forall j \neq k; \quad (13)$$

$$\sum_{j=1}^N f_{j \rightarrow i}^{(k)} = \sum_{j=1, j \neq i}^N f_{i \rightarrow j}^{(k)}, \quad \forall i \neq k; \quad (14)$$

$$\sum_{i=1}^N f_{i \rightarrow k}^{(k)} \geq r_k, \quad \forall k = 1, \dots, N, \quad (15)$$

where $r_{i \rightarrow j}$ ($i, j = 1, \dots, N$) represents the network resource allocation and $f_{i \rightarrow j}^{(k)}$ ($i, j = 1, \dots, N$) is a flow from the source node s to peer k .

By Lemma 3, the minimum WSDT is the solution to the convex optimization of minimizing $\sum_{i=1}^N W_i B / r_i$ subject to (8-15). Thus, we can conclude the following theorem:

Theorem 1: Consider multicasting a file with size B from a source node s to peers $\{1, \dots, N\}$ in a P2P network with both uplink and downlink capacity limits. The minimum weighted sum downloading time for the static scenario and the corresponding optimal static allocation can be found in polynomial time by solving the convex optimization of minimizing $\sum_{k=1}^N W_k B / r_k$ subject to the constraints (8-15).

Theorem 1 gives a solution to the most general static case that we are considering in this paper. However, it can be extended further by adding other linear network constraints (e.g. edge capacity constraints), which are not a concern of this paper.

D. The Uplink-Bandwidth-Sum Bound

For a P2P network with a source node and N peers, the convex optimization in Theorem 1 has $N^3 + N^2 + N$ variables and $2N^3 + 3N^2 + N + 1$ linear constraints. The complexity for the interior point method to solve this convex optimization is $O((N^3)^{3.5})$ [29].

Even though the convex optimization can be solved in polynomial time, its complexity is still too high for practical applications when N is large. Hence, bounds on the minimum WSDT and static schemes having network resource allocations that may be computed with low complexity are desired. In this subsection, we provide an analytical lower bound to the minimum WSDT with $O(N^2)$ complexity for computing both the bound itself and the associated rate allocations.

Consider the cut of $\{V \setminus i\} \rightarrow \{i\}$ for any static allocation $r_{i \rightarrow j}$ $i, j \in \{1, \dots, N\}$, the maximum flow rate from the source node s to peer i , r_i , is limited by

$$r_i \leq \sum_{j=1}^N r_{j \rightarrow i} \leq D_i, \quad (16)$$

and

$$\sum_{i=1}^N r_i \leq \sum_{i=1}^N \sum_{j=1}^N r_{j \rightarrow i} \quad (17)$$

$$= \sum_{j=1}^N r_{j \rightarrow j} + \sum_{j=1}^N \sum_{i=1, i \neq j}^N r_{j \rightarrow i} \quad (18)$$

$$\leq U_s + \sum_{j=1}^N U_j. \quad (19)$$

Consider the cut of $\{s\} \rightarrow \{1, \dots, N\}$, r_i is also bounded by

$$r_i \leq \sum_{j=1}^N r_{j \rightarrow i} \leq U_s. \quad (20)$$

Inequalities (16) and (20) indicate that the downloading flow rate for peer i is limited by peer i 's downlink capacity and the source node's uplink capacity respectively. These two constraints are not only valid for the static scenario but also for dynamic scenarios.

Inequality (19) shows that the sum of the downloading flow rates for all peers is bounded by the total amount of the network uplink resource. Again, this constraint holds in both the static and dynamic cases.

These three constraints characterize an outer bound to the region of all feasible sets of $\{r_i\}_{i=1}^N$ satisfying (8 - 15). Therefore, for any static scheme, every set of feasible flow rates $\{r_i\}_{i=1}^N$ must satisfy (16), (19) and (20). However, not all $\{r_i\}_{i=1}^N$ satisfying (16), (19) and (20) are feasible.

Consider the following example: Let $B = 1$, $U_s = 3$, and $U_1 = U_2 = U_3 = 1$ (with $D_1 = D_2 = D_3 = \infty$), the downloading flow rates $r_1 = r_2 = 3, r_3 = 0$ satisfies the constraints (16), (19) and (20), but are not feasible because there is no solution to (8 - 15) with $r_1 = r_2 = 3, r_3 = 0$, i.e., no static scenario to support $r_1 = r_2 = 3, r_3 = 0$ simultaneously. Specifically, for $r_1 + r_2 = 6$, all upload capability must be deployed, including that of peer 3. However, since $r_3 = 0$, any transmission by peer 3 would violate the conservation-of-flow constraint.

Because all feasible sets of $\{r_i\}_{i=1}^N$ satisfy (16) (19) and (20), the solution to the following minimization problem provides a lower bound to the minimum WSDT for the static scenario:

$$\begin{aligned} & \min && \sum_{i=1}^N W_i \frac{B}{r_i} \\ & \text{subject to} && \sum_{i=1}^N r_i \leq U_s + \sum_{i=1}^N U_i \\ & && 0 \leq r_i \leq \tilde{D}_i \triangleq \min(D_i, U_s), \forall i = 1, \dots, N, \end{aligned} \quad (21)$$

where only r_i ($i = 1, \dots, N$) are the variables. Empirical experiments presented in Section V-E show that this lower bound is tight for most P2P networks.

The minimization problem (21) is a convex optimization. Its optimal solutions are also the solutions to the associated Karush–Kuhn–Tucker (KKT) conditions [29]. The KKT conditions for problem (21) are

$$-W_i \cdot \frac{1}{r_i^2} + \lambda + \mu_i = 0, \quad i = 1, \dots, N; \quad (22)$$

$$\sum_{i=1}^N r_i - U_s - \sum_{i=1}^N U_i \leq 0, \quad \lambda \geq 0; \quad (23)$$

$$r_i - \tilde{D}_i \leq 0, \quad \mu_i \geq 0; \quad (24)$$

$$\lambda \left(\sum_{i=1}^N r_i - U_s - \sum_{i=1}^N U_i \right) = 0; \quad (25)$$

$$\mu_i (r_i - \tilde{D}_i) = 0, \quad i = 1, \dots, N. \quad (26)$$

Solving the KKT conditions yields the following optimal solution for $\{r_i\}$:

$$r_i^* = \begin{cases} \sqrt{W_i} \cdot R, & \text{if } \sqrt{W_i} \cdot R < \tilde{D}_i \\ \tilde{D}_i & \text{if } \sqrt{W_i} \cdot R \geq \tilde{D}_i \end{cases}, \quad (27)$$

where R is chosen such that

$$\sum_{i=1}^N r_i^* = \min \left(U_s + \sum_{i=1}^N U_i, \sum_{i=1}^N \tilde{D}_i \right). \quad (28)$$

The lower bound to the WSDT for the static scenario is then

$$\sum_{i=1}^N W_i t_i \geq \sum_{i=1}^N W_i \frac{B}{r_i^*}, \quad (29)$$

with r_i^* as specified in (27).

For the special case where $W_i = 1$ and $D_i = \infty$ ($i = 1, \dots, N$), the solution given in (27) becomes

$$r_i^* = \min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N}), \quad (30)$$

and the lower bound to the minimum WSDT is

$$\sum_{i=1}^N t_i \geq \frac{NB}{\min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N})}. \quad (31)$$

Mutualcast [9] was designed to minimize the maximum download time for the case where $D_i = \infty$. However, since Mutualcast can achieve the download time of $\frac{B}{\min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N})}$ for all peers, it achieves the lower bound of (29) for the $W_i = 1$ case. This fact shows both that the lower bound of (29) is tight when $W_i = 1$ and $D_i = \infty$ and that Mutualcast minimizes sum download time as well as the maximum download time when $D_i = \infty$.

IV. MUTUALCAST AND EXTENDED MUTUALCAST FOR THE EQUAL-WEIGHT STATIC CASE

The concluding paragraph of Section III-D stated that Mutualcast minimizes the sum download time for the case where $D_i = \infty$. In this section we extend Mutualcast to provide an algorithm we call Extended Mutualcast that handles finite constraints on D_i (possibly delivering different rates to different peers) while still minimizing the sum download time.

A. Mutualcast

Mutualcast delivers the same rate to every peer. Assuming $D_i = \infty$, Mutualcast can support peers with any rate $R \leq \min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N})$. The key aspect of Mutualcast is that the source first delivers bandwidth to each node according to how much that node can share with all other peers. After that, if the source has any upload bandwidth left over, it is divided evenly among all peers. This leftover rate goes serves only one peer; it is not relayed to any other peers. Thus Mutualcast first forms a series of depth-two trees from the source to all

nodes. Then, if there is any source upload bandwidth left over, it is used to form a series of depth-one trees. Here is a specification of the Mutualcast algorithm (without considering helper nodes):

Algorithm 1 The Mutualcast Algorithm for Network Resource Allocation

```

1:  Given broadcast rate  $R \leq \min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N})$ .
2:  Given an ordering of the peers. (Without loss of generality, assume the order is  $1, \dots, N$ .)
3:  for  $i = 1$  to  $N$  do
4:     $r_{s \rightarrow i} \leftarrow \min(R, U_i / (N - 1))$ .
5:     $r_{i \rightarrow j} \leftarrow r_{s \rightarrow i}$  for  $j \neq i$ .
6:     $R \leftarrow R - r_{s \rightarrow i}$ .
7:     $U_s \leftarrow U_s - r_{s \rightarrow i}$ .
8:  end for
9:   $r_{s \rightarrow i} \leftarrow r_{s \rightarrow i} + R$ .

```

Mutualcast delivers information to all peers at the same rate. As described in Algorithm 1 the highest rate that Mutualcast can deliver is

$$R = \min(U_s, \frac{U_s + \sum_{i=1}^N U_i}{N}). \quad (32)$$

Consider two examples with ten peers, one in which $R = U_s$ and one in which $R = \frac{U_s + \sum_{i=1}^N U_i}{N}$.

First is an example where $R = U_s$. Note that in general it is not possible for any peer to receive information at a rate higher than U_s . Let $U_s = 1$, $U_i = 1$ for all ten peers, and $D_i = \infty$ for all ten peers. Mutualcast achieves $R = U_s = 1$ by having nine peers receive rate $1/9$ from the source and forward at that rate to the nine other peers. One peer receives no information directly from the source because by the time the Mutualcast algorithm gets to that peer, the source upload bandwidth has been used up.

For an example where $R = \frac{U_s + \sum_{i=1}^N U_i}{N}$, a larger U_s is necessary. Let $U_s = 10$, $U_i = 1$ for all ten peers and $D_i = \infty$ for all ten peers. Mutualcast achieves $R = \frac{U_s + \sum_{i=1}^N U_i}{N} = 2$. In the first part of the Mutualcast algorithm, all ten peers receive rate $1/9$ from the source and relay at that rate to the nine other peers. At this point there remains $80/9$ of source upload

bandwidth, which is distributed evenly so that each peer receives a rate of $8/9$ directly from the source that it does not relay. In total, each peer receives rate 2 which is comprised of rate 1 from other peers, rate $1/9$ from the source that it relays to the other peers, and rate $8/9$ from the source that it does not relay.

The basic Mutualcast algorithm does not consider download constraints. The slight modification of Mutualcast given below includes download bandwidth constraints D_i in the simplest possible way. Note that if all peers are to receive at the same rate, that rate must be less than the smallest download constraint. This is reflected in line 1 of Algorithm 2.

Algorithm 2 The Mutualcast Algorithm with Download Bandwidth Constraints

```

1:  Given broadcast rate  $R \leq \min \left( U_s, \frac{U_s + \sum_{i=1}^N U_i}{N}, \min_{j \in \{1, \dots, N\}} (D_j) \right)$ .
2:  Given an order of peers. (Without loss of generality, assume the order is  $1, \dots, N$ .)
3:  for  $i = 1$  to  $N$  do
4:     $r_{s \rightarrow i} \leftarrow \min(R, D_i, U_i / (N - 1))$ .
5:     $r_{i \rightarrow j} \leftarrow r_{s \rightarrow i}$  for  $j \neq i$ .
6:     $R \leftarrow R - r_{s \rightarrow i}$ .
7:     $U_s \leftarrow U_s - r_{s \rightarrow i}$ .
8:     $D_j \leftarrow D_j - r_{s \rightarrow i}$  for  $j = 1, \dots, N$ .
9:  end for
10:  $r_{s \rightarrow i} \leftarrow r_{s \rightarrow i} + R$ .

```

As with the original Mutualcast, Algorithm 2 delivers the same rate to every peer. This alone is enough to prevent it from minimizing the sum download time in general when there are download constraints. However, it will turn out to be an important component of Extended Mutualcast, which is an algorithm that does minimize the sum download time under general download constraints.

B. Extended Mutualcast

Setting $W_i = 1$ for all i in (27) produces the following lower bound on the sum download time when both upload and download constraints are considered:

$$\sum_{i=1}^N \frac{B}{r_i^*}, \quad (33)$$

where

$$r_i^* = \begin{cases} R, & \text{if } R < \tilde{D}_i \\ \tilde{D}_i & \text{if } R \geq \tilde{D}_i \end{cases} \quad (34)$$

$$= \min(R, D_i, U_s), \quad (35)$$

where R is chosen such that

$$\sum_{i=1}^N r_i^* = \min(U_s + \sum_{i=1}^N U_i, \sum_{i=1}^N \tilde{D}_i). \quad (36)$$

This lower bound can be achieved by a routing-based scheme that we call Extended Mutualcast.

Consider a P2P network with constraints on peer uplink bandwidth and peer downlink bandwidth. Without loss of generality, assume that $D_1 \leq \dots \leq D_N$. Hence, $\tilde{D}_1 \leq \dots \leq \tilde{D}_N \leq U_s$ and $r_1^* \leq \dots \leq r_N^*$. The network resource allocation and the routing for Extended Mutualcast are provided in Algorithms 3 and 4 respectively.

Algorithm 3 Network Resource Allocation for Extended Mutualcast

- 1: Calculate R and r_i^* ($i = 1, \dots, N$) from (33-36).
 - 2: Initialize network resource allocation $r_{i \rightarrow j} \leftarrow 0$.
 - 3: **if** $R \leq \tilde{D}_1$ **then**
 - 4: $r_i^* = R$ for all $i = 1, \dots, N$.
 - 5: Apply Algorithm 2 with rate R to the network.
 - 6: **else if** $\tilde{D}_j < R \leq \tilde{D}_{j+1}$ for $j \in \{1, \dots, N-1\}$ **then**
 - 7: $r_i^* = \tilde{D}_i$ for $i \in \{1, \dots, j\}$.
 - 8: $r_i^* = R$ for $i \in \{j+1, \dots, N\}$.
 - 9: **for** Step $i = 1$ to j **do**
 - 10: Successively apply Algorithm 2 with rate $\tilde{D}_i - \tilde{D}_{i-1}$ ($\tilde{D}_0 \triangleq 0$) to the network with the source node s and the ordered peers $\{i, \dots, N\}$. Note that with each successive application of Algorithm 2, the values of $r_{i \rightarrow j}$ accumulate.
 - 11: **end for**
 - 12: Step $j+1$: Apply Algorithm 2 one final time with rate $R - \tilde{D}_j$ to the network with the source node s and the ordered peers $\{j+1, \dots, N\}$. Again, the values of $r_{i \rightarrow j}$ accumulate.
 - 13: **else if** $R \geq \tilde{D}_N$ **then**
 - 14: $r_i^* = \tilde{D}_i = D_i$ for $i = 1, \dots, N$.
 - 15: **for** Step $i = 1$ to N **do**
 - 16: Successively apply Algorithm 2 with supporting rate $\tilde{D}_i - \tilde{D}_{i-1}$ to the network with the source node s and the ordered peers $\{i, \dots, N\}$. Note that with each successive application of Algorithm 2, the values of $r_{i \rightarrow j}$ accumulate.
 - 17: **end for**
 - 18: **end if**
-

Algorithm 4 Routing Scheme for Extended Mutualcast

- 1: Given R and r_i^* ($i = 1, \dots, N$) from (33-36).
 - 2: Given the network resource allocation $r_{i \rightarrow j}$ ($i, j = 1, \dots, N$) by Algorithm 3 where $r_{i \rightarrow i} \triangleq r_{s \rightarrow i} \geq r_{i \rightarrow j}$. (This routing scheme is based on that network resource allocation.)
 - 3: Partition the whole file into many chunks.
 - 4: **if** $R \leq \tilde{D}_1$ **then**
 - 5: Apply the routing scheme of Mutualcast [9]. That is, for each $i = 1, \dots, N$ and some $j \neq i$, accumulatively route $\frac{r_{i \rightarrow j}}{R}$ fraction of all chunks from the source node to peer i , and then copy and route them from peer i to other peers. Accumulatively route the rest of the chunks are from the source node to all peers directly.
 - 6: **else if** $\tilde{D}_j < R \leq \tilde{D}_{j+1}$ for $j = 1, \dots, N - 1$. **then**
 - 7: For $k = 1, \dots, j$, broadcast $\frac{\tilde{D}_k - \tilde{D}_{k-1}}{R}$ fraction of all chunks to peers $\{k, \dots, N\}$ by Mutualcast. Broadcast the rest of the chunks to peers $\{j + 1, \dots, N\}$ by Mutualcast.
 - 8: Until peers $\{j + 1, \dots, N\}$ finish downloading.
 - 9: **for** Step $i = j$ to 1 **do**
 - 10: In Step i , the interesting chunks are those peer i hasn't received.
 - 11: For $k = 1, \dots, i$, accumulatively broadcast $\frac{\tilde{D}_k - \tilde{D}_{k-1}}{\tilde{D}_i}$ fraction of the interesting chunks to peers $k, \dots, i$ by Mutualcast.
 - 12: Until peer i finishes downloading.
 - 13: Note that peers $i + 1, \dots, N$ finish downloading before Step i .
 - 14: Note that prior to Step i , none of the peers $1, \dots, i$ contain the interesting chunks broadcast during Step i .
 - 15: **end for**
 - 16: **else if** $R \geq \tilde{D}_N$ **then**
 - 17: **for** Step $i = N$ to 1 **do**
 - 18: In Step i , the interesting chunks are those peer i hasn't received.
 - 19: For $k = 1, \dots, i$, accumulatively broadcast $\frac{\tilde{D}_k - \tilde{D}_{k-1}}{\tilde{D}_i}$ fraction of the interesting chunks to peers $k, \dots, i$ by Mutualcast.
 - 20: Until peer i finishes downloading.
 - 21: **end for**
 - 22: **end if**
-

The network resource allocation for Extended Mutualcast (Algorithm 3) is obtained by successively applying Algorithm 2 to the P2P network or part of the P2P network. The network resource allocation by Algorithm 3 has $r_{s \rightarrow i} \geq r_{i \rightarrow j}$ for all i, j . The flow rate to peer i , r_i , is then equal to its download rate $\sum_{j=1}^N r_{j \rightarrow i}$. The routing scheme for Extended Mutualcast (Algorithm 4) guarantees that the entire flow rate r_i is *useful*. For the Extended Mutualcast rate allocation, $r_i = \min(R, \tilde{D}_i)$ so that the lower bound (33-36) on sum download time is achieved. Theorem 2 formally states and proves this fact.

Theorem 2: (Minimum Sum Download time) Consider multicasting a file with size B from a source node s to peers $\{1, \dots, N\}$ in a P2P network with constraints on peer uplink bandwidth and peer downlink bandwidth. The minimum sum download time for the static scenario is $\sum_{i=1}^N \frac{B}{r_i^*}$, where r_i^* , the flow rate to peer i , follows from (33-36).

Proof: **(Converse)** From (33-36), $\sum_{i=1}^N \frac{B}{r_i^*}$ is a lower bound on the minimum sum download time. Hence, any sum download time less than $\sum_{i=1}^N \frac{B}{r_i^*}$ is not achievable.

(Achievability) It is sufficient to show that (a) Extended Mutualcast is applicable to any P2P network, and (b) Extended Mutualcast provides a static scenario in which the flow rate from the source node to peer i is r_i^* of (33-36).

(To Show (a)) It is sufficient to show that in Algorithm 3, the rate for each applied Algorithms 2 is attainable. In other words, each rate for the applied network is less than or equal to the minimum of the source node's uplink capacity and the total uplink resource over all of the peers.

- If $R \leq \tilde{D}_1$, then $R \leq U_s$ and $R \leq \frac{U_s + \sum_{i=1}^N U_i}{N}$. Hence, the rate R is attainable for Algorithm 2 in Line 4, Algorithm 3.
- If $\tilde{D}_j < R \leq \tilde{D}_{j+1}$, consider the worst case of $D_i = R$ for $i = j+1, \dots, N$ and $U_s = R$. In

this case, we have

$$r_i^* = \tilde{D}_i, \quad i = 1, \dots, N; \quad (37)$$

$$U_i \leq D_i = \tilde{D}_i, \quad i = 1, \dots, j; \quad (38)$$

$$\tilde{D}_1 \leq \dots \leq \tilde{D}_j < R = \tilde{D}_{j+1} = \dots = \tilde{D}_N = U_s; \quad (39)$$

$$\sum_{i=1}^N \tilde{D}_i = U_s + \sum_{i=1}^N U_i. \quad (40)$$

Denote $U_p^{(i)}$ as the total amount of the peers' uplink resource used after Step i , and $U_s^{(i)}$ as the total amount of the source node's uplink resource used after Step i . For Step 1, $\tilde{D}_1 \leq U_s$ and $\tilde{D}_1 \leq \frac{\sum_{i=1}^N \tilde{D}_i}{N} = \frac{U_s + \sum_{i=1}^N U_i}{N}$. Hence, Algorithm 2 in Step 1 is feasible. Suppose Algorithm 2 is feasible for Step 1 to Step n ($1 \leq n \leq j$). Then $U_s^{(i)} = \tilde{D}_i$ and $U_p^{(i)} = \sum_{k=1}^i \tilde{D}_k + (N-i-1)\tilde{D}_i$. Hence,

$$U_p^{(i)} \geq \sum_{k=1}^i \tilde{D}_k = \sum_{k=1}^i D_k \geq \sum_{k=1}^i U_k, \quad (41)$$

which indicates that Algorithm 2 for Step 1 to Step i fully deploys the uplink resources of peers $1, \dots, i$.

Now consider Algorithm 2 for Step $n+1$, the supporting rate is $\tilde{D}_{n+1} - \tilde{D}_n$. The source node's uplink is $R - \tilde{D}_n$. The total uplink resource is

$$U_s + \sum_{i=1}^N U_i - (U_s^{(n)} + U_p^{(n)}) \quad (42)$$

$$= \sum_{i=1}^N \tilde{D}_i - \left(\sum_{k=1}^n \tilde{D}_k + (N-n)\tilde{D}_n \right) \quad (43)$$

$$= \sum_{k=n+1}^N (\tilde{D}_k - \tilde{D}_n) \quad (44)$$

$$\geq (N-n)(\tilde{D}_{n+1} - \tilde{D}_n), \quad (45)$$

where (43) follows from (40), and (45) follows from (39). Hence, the rate $\tilde{D}_{n+1} - \tilde{D}_n$ is less than or equal to the total available uplink resource (42) divided by the number of peers, $N - n$. We also can see that $\tilde{D}_{n+1} - \tilde{D}_n$ is less than or equal to the available source node's uplink bandwidth, $R - \tilde{D}_n$. Therefore, Algorithm 2 for Step $n + 1$ is also feasible. By induction, Algorithm 2 is feasible for every step.

- If $R \geq \tilde{D}_N$, then

$$D_1 \leq \dots \leq D_N \leq R \leq U_s; \quad (46)$$

$$r_i^* = D_i = \tilde{D}_i, \quad i = 1, \dots, N; \quad (47)$$

$$\sum_{i=1}^N r_i^* = \sum_{i=1}^N D_i \leq \sum_{i=1}^N U_i + U_s. \quad (48)$$

Consider the worst case of $\sum_{i=1}^N D_i = \sum_{i=1}^N U_i + U_s$. For this worst case, Algorithm 2 in Line 14 is feasible following an argument similar to that for the case of $\tilde{D}_j < R \leq \tilde{D}_{j+1}$.

Therefore, Extended Mutualcast in Algorithm 3 is applicable to any P2P network.

(To Show (b)) From Algorithms 2 and 3, Extended Mutualcast constructs a static scenario with $r_{s \rightarrow i} \triangleq r_{i \rightarrow i} \geq r_{i \rightarrow j}$ for $i, j = 1, \dots, N$, and $\sum_{j=1}^N r_{j \rightarrow i} \geq \min(R, \tilde{D}_i) = r_i^*$. Hence, the maximum flow from the source node to peer i is larger than or equal to

$$\sum_{j=1, j \neq i}^N \min(r_{s \rightarrow j}, r_{j \rightarrow i}) + r_{s \rightarrow i} \quad (49)$$

$$= \sum_{j=1, j \neq i}^N r_{j \rightarrow i} + r_{s \rightarrow i} \quad (50)$$

$$\geq r_i^*. \quad (51)$$

Therefore, Extended Mutualcast provides a static scenario in which the flow rate from the source node to peer i is r_i^* of (33-36). ■

Theorem 2 showed that Extended Mutualcast minimizes the sum download time for any

static P2P network. When the total uplink bandwidth resource is sufficiently abundant, Extended Mutualcast also minimizes the weighted sum download time for any set of weights because all peers are downloading at their limit of $\tilde{D}_i$. Corollary 1 formally states and proves this fact.

Corollary 1: Consider multicasting a file with size B from a source node s to peers $\{1, \dots, N\}$ in a P2P network with constraints on peer uplink bandwidth and peer downlink bandwidth. If $U_s + \sum_{i=1}^N U_i \geq \sum_{i=1}^N \tilde{D}_i$, the set of the flow rates $r_i = \tilde{D}_i$ ($i = 1, \dots, N$) is attainable. Hence, the minimum weighted sum download time for the static scenario is $\sum_{i=1}^N W_i \frac{B}{\tilde{D}_i}$ for any given weights W_i .

Proof: (**Achievability**) Note that when $U_s + \sum_{i=1}^N U_i \geq \sum_{i=1}^N \tilde{D}_i$, r_i^* of (33-36) is equal to $\tilde{D}_i$. By Theorem 2, Extended Mutualcast can achieve the download rates $r_i^* = \tilde{D}_i$.

(**Converse**) By Max-Flow Min-Cut Theorem, the maximum flow from source node to peer i is limited by $\tilde{D}_i = \min(D_i, U_s)$. Hence, any weighted sum downloading time less than $\sum_{i=1}^N W_i \frac{B}{\tilde{D}_i}$ is not achievable. ■

V. A DEPTH-2 APPROACH FOR THE MINIMIZING WEIGHTED SUM DOWNLOAD TIME

Section IV provided a complete solution (Extended Mutualcast) for achieving the minimum sum download time with constraints on both peer uplink bandwidth and peer downlink bandwidth. That section concluded by showing that if the total uplink resource is sufficiently abundant, Extended Mutualcast minimizes WSDT for any set of weights. This section attacks the minimization of WSDT more broadly.

Mutualcast and Extended Mutualcast construct only two types of trees to distribute content. The first type is a depth-1 tree as shown in Fig. 6(a). The source node s broadcasts content to all peers directly with rate $r_{s \rightarrow i}^{(1)}$, $i = 1, \dots, N$. The second type is a depth-2 tree as shown in Fig. 6(b). The source node distributes content to peer i with rate $r_{s \rightarrow i}^{(2)}$, and then peer i relays this content to all other peers.

In Mutualcast, the rates $r_{s \rightarrow i}^{(1)}$ are constrained to be equal for all i . Also, for a fixed i ,

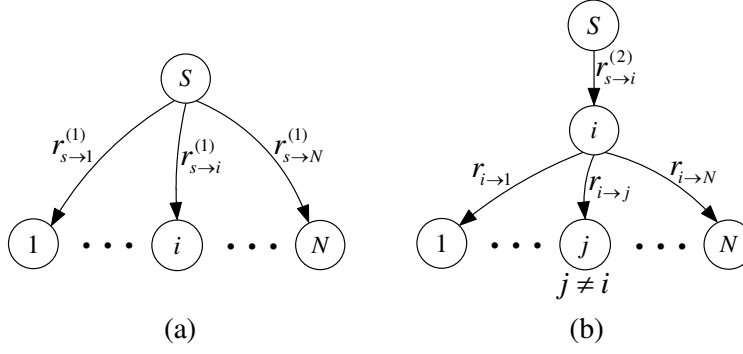


Fig. 6

THE TWO TREE STRUCTURES USED BY MUTUALCAST AND EXTENDED MUTUALCAST: (A) DEPTH-1 TREE; (B) DEPTH-2 TREE.

$r_{s \rightarrow i}^{(2)} = r_{i \rightarrow j}$ for all $j \in \{1, \dots, N\}; j \neq i$. These constraints on the network resource allocation simplify the mechanism design and allow a simple routing-based scheme. These two constraints together ensure that each peer downloads content at the same rate. However, to optimize WSDT peers surely need to download content and different rates.

In Section IV we saw that peers needed to download content at different rates to minimize the sum download time with peer downlink bandwidth constraints. The Extended Mutualcast algorithm provided a way to serve the peers at different rates corresponding to their download bandwidth constraints so as to minimize the sum download time. However, Extended Mutualcast required successive applications of Mutualcast which led to a complicated routing protocol.

In order to serve peers at different rates to minimize WSDT and still maintain a simple mechanism design, we apply the technique of rateless coding at the source node. A rateless code is an erasure correcting code. It is rateless in the sense that the number of encoded packets that can be generated from the source message is potentially limitless [30]. Suppose the original file size is B packets, once the receiver has received any B' packets, where B' is just slightly greater than B , the whole file can be recovered.

Fountain codes [30], LT codes [31], and raptor codes [32] are rateless erasure codes. LT

codes have linear encoding complexity and sub-linear decoding complexity. Raptor codes have linear encoding and decoding complexities. The percentage of the overhead packets goes to zero as B goes to infinity. In practice, the overhead is about 5% for LT codes with file size $B \simeq 10000$ [30]. This sub-section focuses on applying rateless erasure codes for P2P file transfer instead of designing rateless erasure codes. Hence, we assume the overhead of the applied rateless erasure code is zero for simplicity. We note that if redundancy does not need to be limitless, there are solutions that provide zero overhead [33].

A. The Rateless-Coding-Based Scheme

We propose a rateless-coding-based scheme that constructs the two types of trees in Fig. 6 to distribute the content as did Mutualcast and Extended Mutualcast. The source node first partitions the whole file into B chunks and applies a rateless erasure code to these B chunks producing a potentially limitless number of chunks.

For the depth-1 tree, the source node broadcasts different rateless-coded chunks directly to each peer. For the depth-2 trees, The source node sends different rateless-coded chunks to each peer, and then that peer relays some or all of those chunks to other some or all of the other peers. A key point is that every chunk transmitted by the source is different from every other chunk transmitted by the source. This condition guarantees that all chunks received by a peer are useful (because they are not a repetition of a previously received chunk). Hence, a peer can decode the whole file as long as it receives B coded chunks.

The rateless-coding-based scheme allows peers to download content at different rates with a simpler mechanism than the routing-based approach of Extended Mutualcast. Peers don't have to receive exactly the same chunks to decode the whole file. Hence, the two types of tree structures can be combined as one tree structure with depth 2, but without the constraint that the rate from the peer to its neighbors has to equal the rate from the source to the peer.

The source node sends coded chunks to peer i with rate $r_{s \rightarrow i} = r_{s \rightarrow i}^{(1)} + r_{s \rightarrow i}^{(2)}$, and peer i relays some of them to peer j ($j \neq i$) with rate $r_{i \rightarrow j} \leq r_{s \rightarrow i}$. Note that the values of $r_{i \rightarrow j}$ do

not even need to be the same for a fixed value of i and different values of j .

Another benefit of applying a rateless coding approach is that it is robust to packet loss in the Internet if we allow some extra rate for each user.

Assuming rateless coding at the source node and constraining the P2P network to include only depth-2 trees as discussed above, the network resource allocation that minimizes WSDT can be obtained by solving the following convex optimization problem.

$$\begin{aligned}
& \min && \sum_{i=1}^N W_i \frac{B}{r_i} \\
& \text{subject to} && 0 \leq r_{i \rightarrow j} \leq r_{i \rightarrow i}, \forall i, j = 1, \dots, N, \\
& && \sum_{i=1}^N r_{i \rightarrow i} \leq U_s, \\
& && \sum_{j=1, j \neq i}^N r_{i \rightarrow j} \leq U_i, \forall i = 1, \dots, N, \\
& && r_i = \sum_{j=1}^N r_{j \rightarrow i} \leq D_i, \forall i = 1, \dots, N,
\end{aligned} \tag{52}$$

where $r_{i \rightarrow i} \triangleq r_{s \rightarrow i}$. The complexity for the interior point method to solve this convex optimization is $O((N^2)^{3.5})$ [29].

For the case of $W_i = 1, D_i = \infty$, the optimal resource allocation is, of course, the same as that of Mutualcast.

For the case of $W_i = 1$ and finite values of D_i , Algorithm 3 provides an optimal network resource allocation that certainly also solves (52). A key point is that the routing of Algorithm 4 becomes unnecessary if the source employs rateless coding. Peers need only relay the appropriate number of chunks to the appropriate neighbors without worrying about *which* chunks are relayed.

For other cases, we provide a network resource allocation that we have not proven to be optimal. We will see in Section V-E that its performance achieves the lower bound (29) across a wide range of parameterizations.

B. Resource Allocation for Networks with $D_i = \infty$

Consider a P2P network in which peer uplink bandwidth is constrained but $D_i = \infty$ for $i = 1, \dots, N$. If $\sum_{i=1}^N U_i \geq (N-1)U_s$, then the resource allocation of $r_{i \rightarrow j} = \frac{U_s U_i}{\sum_{i=1}^N U_i}$ achieves the minimum WSDT with flow rates $r_i = U_s$ for all $i = 1, \dots, N$. (This is the case discussed at the end of Section IV.) Otherwise, consider the following water-filling-type solution:

$$\tilde{r}_i = \begin{cases} \sqrt{W_i} \cdot R, & \text{if } \sqrt{W_i} \cdot R < U_s, \\ U_s & \text{if } \sqrt{W_i} \cdot R \geq U_s, \end{cases} \quad (53)$$

where R is chosen such that

$$\sum_{i=1}^N \tilde{r}_i = U_s + \sum_{i=1}^N U_i - \max_k(\tilde{r}_k). \quad (54)$$

The potential suboptimality of this approach comes from the subtraction of $\max_k(\tilde{r}_k)$ on the right side of (54) which does not appear in (28). Note that when $\max(\tilde{r}_k) \ll U_s + \sum_{i=1}^N U_i$ (this is true for large N), $\tilde{r}_i$ is close to r_i^* corresponding to the lower bound (27).

We now show that the proposed suboptimal network resource allocation ensures that the flow rate to peer i is larger than or equal to $\tilde{r}_i$ of (53). Hence, the WSDT for the proposed suboptimal resource allocation is very close to the lower bound to the minimum WSDT for large networks.

First assign the rates for the depth-2 trees with

$$r_{s \rightarrow i}^{(2)} = c \frac{U_i \max(\tilde{r}_k)}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} \quad (55)$$

and

$$r_{i \rightarrow j} = c \frac{U_i \tilde{r}_j}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i}, \quad (56)$$

where c is chosen to be the largest possible value satisfying

$$\sum_{i=1}^N r_{s \rightarrow i}^{(2)} \leq U_s \quad (57)$$

$$\sum_{j=1, j \neq i}^N r_{i \rightarrow j} \leq U_i. \quad (58)$$

Plugging (55) (56) into (57) (58), and obtain

$$c = \min(1, \frac{U_s}{\max(\tilde{r}_k)\alpha}), \quad (59)$$

where $\alpha = \sum_{i=1}^N \frac{U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i}$.

If $c = \frac{U_s}{\alpha \max(\tilde{r}_k)}$, then the depth-2 trees have already fully deployed the source node's uplink. The rate assignment for depth-2 trees is the network resource allocation for the rateless-coding-based scheme.

If $c = 1$, then the depth-2 trees have fully deployed all peers' uplinks, but not the source node's uplink. Hence, we can further deploy the rest of the source node's uplink to construct the depth-1 tree. After constructing the depth-2 trees, the flow rate to peer i is

$$\beta_i \triangleq r_{s \rightarrow i}^{(2)} + \sum_{j=1, j \neq i}^N r_{j \rightarrow i} = \alpha \tilde{r}_i + \frac{(\max_k(\tilde{r}_k) - \tilde{r}_i)U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i}.$$

The rest of the source node's uplink is

$$U_s - \sum_{i=1}^N r_{s \rightarrow i}^{(2)} = U_s - \alpha \max(\tilde{r}_k).$$

The optimal depth-1 tree can be obtained by the convex optimization

$$\begin{aligned}
& \min && \sum_{i=1}^N W_i \frac{B}{r_i} \\
& \text{subject to} && r_i = \beta_i + r_{s \rightarrow i}^{(1)}, \\
& && r_{s \rightarrow i}^{(1)} \geq 0, \forall i = 1 \dots, N, \\
& && \sum_{i=1}^N r_{s \rightarrow i}^{(1)} \leq U_s - \alpha \max(\tilde{r}_k).
\end{aligned} \tag{60}$$

The optimal solution to the problem (60) is

$$r_i = \begin{cases} \sqrt{W_i} \cdot R, & \text{if } \sqrt{W_i} \cdot R \geq \beta_i, \\ \beta_i & \text{if } \sqrt{W_i} \cdot R < \beta_i, \end{cases} \tag{61}$$

and

$$r_{s \rightarrow i}^{(1)} = \begin{cases} \sqrt{W_i} \cdot R - \beta_i, & \text{if } \sqrt{W_i} \cdot R \geq \beta_i, \\ 0 & \text{if } \sqrt{W_i} \cdot R < \beta_i, \end{cases} \tag{62}$$

where R is chosen such that $\sum_{i=1}^N r_{s \rightarrow i}^{(1)} = U_s - \alpha \max(\tilde{r}_k)$ (also $\sum_{i=1}^N r_i = U_s + \sum_{i=1}^N U_i$).

The complexity of calculating this suboptimal network resource allocation is $O(N^2)$. Note that when $W_i = 1$ for all $i = 1, \dots, N$, this suboptimal network resource allocation is the same as that of Mutualcast, and hence, this network resource allocation is optimal for this case. For general weight settings, this network resource allocation guarantees that the flow rate to peer i is larger than or equal to $\tilde{r}_i$, which is stated in the following theorem.

Theorem 3: For P2P networks with peer uplink constraints but no peer downlink constraints (i.e. $D_i = \infty$), the network resource allocation determined by (55) (56) (59) (61) and (62) ensures that the WSDT $\sum_{i=1}^N W_i B / r_i$ is less than or equal to the WSDT associated to (53), i.e., $\sum_{i=1}^N W_i B / \tilde{r}_i$.

Proof: If $c = \frac{U_s}{\alpha \max(\tilde{r}_k)}$, the flow rate to peer i is

$$r_i = r_{s \rightarrow i}^{(2)} + \sum_{j=1, j \neq i}^N r_{j \rightarrow i} \quad (63)$$

$$= c\alpha\tilde{r}_i + c \frac{(\max_k(\tilde{r}_k) - \tilde{r}_i)U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} \quad (64)$$

$$\geq c\alpha\tilde{r}_i \quad (65)$$

$$= \frac{U_s}{\max(\tilde{r}_k)} \tilde{r}_i \quad (66)$$

$$\geq \tilde{r}_i, \quad (67)$$

where (67) follows from $\tilde{r}_k \leq \tilde{D}_k \leq U_s$. If $c = 1$, a feasible solution to problem (60) is

$$r_{s \rightarrow i}^{(1)} = (U_s - \alpha \max(\tilde{r}_k)) \frac{\tilde{r}_i}{\sum_{k=1}^N \tilde{r}_k}.$$

For this feasible solution, the total flow rate to peer i with the depth-1 tree and the depth-2 trees is

$$r_i = \beta_i + (U_s - \alpha \max(\tilde{r}_k)) \frac{\tilde{r}_i}{\sum_{k=1}^N \tilde{r}_k} \quad (68)$$

$$= (\alpha + (U_s - \alpha \max(\tilde{r}_k)) \frac{1}{\sum_{k=1}^N \tilde{r}_k}) \tilde{r}_i + \frac{(\max(\tilde{r}_k) - \tilde{r}_i)U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i}. \quad (69)$$

Denote $\gamma = \alpha + (U_s - \alpha \max(\tilde{r}_k)) \frac{1}{\sum_{k=1}^N \tilde{r}_k}$. We have

$$U_s + \sum_{i=1}^N U_i = \sum_{i=1}^N r_i \quad (70)$$

$$= \gamma \sum_{i=1}^N \tilde{r}_i + \sum_{i=1}^N \frac{(\max(\tilde{r}_k) - \tilde{r}_i) U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} \quad (71)$$

$$\leq \gamma \sum_{i=1}^N \tilde{r}_i + \sum_{i=1}^N \frac{\max(\tilde{r}_k) U_i}{\sum_{k=1}^N \tilde{r}_k} \quad (72)$$

$$\leq \gamma \sum_{i=1}^N \tilde{r}_i + \max(\tilde{r}_k) \quad (73)$$

$$= \gamma(U_s + \sum_{i=1}^N U_i - \max(\tilde{r}_k)) + \max(\tilde{r}_k). \quad (74)$$

Some of these steps are justified as follows:

- (70) follows from the fact that all uplink resource is deployed;
- (72) follows from the inequality $\frac{b-d}{a-d} \leq \frac{b}{a}$ when $a \geq b \geq d \geq 0$;
- (73) follows from $\sum_{k=1}^N \tilde{r}_k = U_s - \max \tilde{r}_k + \sum_{i=1}^N U_i \geq \sum_{i=1}^N U_i \geq U_i$.

Therefore, $\gamma \geq 1$. Hence,

$$r_i = \gamma \tilde{r}_i + \frac{(\max(\tilde{r}_k) - \tilde{r}_i) U_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} \geq \tilde{r}_i, \quad (75)$$

which indicates that this feasible solution r_i to the problem (60) provides a WSDT less than or equal to $\sum_{i=1}^N W_i B / \tilde{r}_i$. Hence, the network resource allocation determined by (55) (56) (59) (61) and (62) also provides a WSDT less than or equal to $\sum_{i=1}^N W_i B / \tilde{r}_i$. ■

C. Resource Allocation with Peer Downlink Constraints

Now we consider P2P networks with both peer uplink bandwidth constraints and peer downlink bandwidth constraints. The idea of the resource allocation for these P2P networks is the same as that for P2P networks without downlink constraints. The details are provided

as follows:

If $U_s + \sum_{i=1}^N U_i \geq \sum_{i=1}^N \tilde{D}_i$, from Corollary 1, Algorithm 3 provides the optimal network resource allocation.

If $U_s + \sum_{i=1}^N U_i < \sum_{i=1}^N \tilde{D}_i$, consider a water-filling-type solution

$$\tilde{r}_i = \begin{cases} \sqrt{W_i} \cdot R, & \text{if } \sqrt{W_i} \cdot R < \tilde{D}_i, \\ \tilde{D}_i & \text{if } \sqrt{W_i} \cdot R \geq \tilde{D}_i, \end{cases} \quad (76)$$

where R is chosen such that $\sum_{i=1}^N \tilde{r}_i = U_s + \sum_{i=1}^N U_i - \max(\tilde{r}_k)$.

First construct the depth-2 trees with rates in (55) and (56), where c is still chosen to be the largest possible value. However, for general P2P networks, the constraints on c are not only (57) (58), but also

$$\beta_i \triangleq r_{s \rightarrow i}^{(2)} + \sum_{j=1, j \neq i}^N r_{j \rightarrow i} \leq \tilde{D}_i. \quad (77)$$

After constructing the depth-2 trees, the flow rate to peer i is β_i . The used source node's uplink is $c\alpha \max(\tilde{r}_k)$. If $c\alpha \max(\tilde{r}_k) < U_s$, we can further use the rest of the source node's uplink to distribute content through the depth-1 tree. The optimal resource allocation for the depth-1 tree can be obtained by the convex optimization

$$\begin{aligned} & \min && \sum_{i=1}^N W_i \frac{B}{r_i} \\ & \text{subject to} && r_i = \beta_i + r_{s \rightarrow i}^{(1)}, \\ & && r_{s \rightarrow i}^{(1)} \geq 0, \forall i = 1 \cdots, N, \\ & && r_i \leq \tilde{D}_i, \forall i = 1 \cdots, N, \\ & && \sum_{i=1}^N r_{s \rightarrow i}^{(1)} \leq U_s - c\alpha \max(\tilde{r}_k). \end{aligned} \quad (78)$$

The optimal solution to the problem (78) is

$$r_i = \begin{cases} \sqrt{W_i} \cdot R, & \text{if } \beta_i \leq \sqrt{W_i} \cdot R \leq \tilde{D}_i, \\ \beta_i & \text{if } \sqrt{W_i} \cdot R < \beta_i, \\ \tilde{D}_i, & \text{if } \sqrt{W_i} \cdot R > \tilde{D}_i, \end{cases} \quad (79)$$

and

$$\tilde{r}_{s \rightarrow i}^{(1)} = r_i - \beta_i, \quad (80)$$

where R is chosen such that

$$\sum_{i=1}^N r_i = U_s + c \sum_{i=1}^N U_i.$$

The complexity of calculating this resource allocation is $O(N^2)$.

D. Routing-Based Depth-2 Scheme

So far, this section has provided a family of rateless-coding-based schemes for P2P file-transfer applications. In this subsection, we introduce a routing-based scheme. This routing-based scheme is a further extension to Extended Mutualcast. This scheme also applies the tree structures in Fig. 6 to distribute content. The constraints on the network resource allocation for this scheme are

$$r_{s \rightarrow k_1}^{(1)} \geq \dots \geq r_{s \rightarrow k_N}^{(1)} \geq 0, \quad (81)$$

and

$$\begin{aligned} r_{s \rightarrow k_i}^{(2)} &\geq r_{k_i \rightarrow k_1} \geq \dots \geq r_{k_i \rightarrow k_{i-1}} \\ &\geq r_{k_i \rightarrow k_{i+1}} \geq \dots \geq r_{k_i \rightarrow k_N}, \forall i = 1, \dots, N, \end{aligned} \quad (82)$$

where $(k_1, \dots, k_N)$ is the order in which the peers finish downloading. In the rest of this subsection, we assume the order is $(1, \dots, N)$ for simplicity. These constraints are stricter than those of the rateless-coding-based scheme, and they are introduced to simplify the routing scheme. In particular, given the order of $(1, \dots, N)$ in which peers finish downloading, the proposed routing-based scheme ensures that at any time in the scheme, peer i has all packets received by peers $i + 1, \dots, N$ for all $i = 1, \dots, N - 1$. This condition can be achievable if the network resource allocation satisfies (81) and (82). For the routing-based scheme, when peer i finishes downloading, the scheme starts to only broadcast the chunks which peer $i + 1$ hasn't received, called interesting chunks. With this condition, the interesting chunks are also new to peers $i + 2, \dots, N$. The details of the routing-based scheme is given in Algorithm 5.

Algorithm 5 Routing-Based Scheme

- 1: Given the order in which the peers finish downloading. Assume the order is $(1, \dots, N)$ for simplicity.
 - 2: Given the network resource allocation $\{r_{i \rightarrow j}, r_{s \rightarrow i}^{(1)}, r_{s \rightarrow i}^{(2)}\}$ for $i, j = 1, \dots, N$, which satisfies the constraints (81) and (82).
 - 3: Partition the whole file into many chunks.
 - 4: **for** Step $i = 1$ to N **do**
 - 5: At the beginning of Step i , peer $1, \dots, i$ finish downloading.
 - 6: In Step i , only broadcast the chunks which peer i doesn't have, called interesting chunks. Note that all peers $i, \dots, N$ don't contain the interesting chunks.
 - 7: Distribute interesting chunks along the depth-1 tree and the depth-2 trees according to the network resource allocation.
 - 8: For the depth-1 tree, the set of chunks sent to peer i contains the set of chunks sent to peer j for $i < j$.
 - 9: For the depth-2 tree in Fig. 6(b), the set of chunks from peer i to peer k contains the set of chunks from peer i to peer j for $k > j$. Peer i only keeps the set of chunks sent to peer $i - 1$ for $i = 2, \dots, N$.
 - 10: The above two chunk selection constraints guarantee that peers $i, \dots, N$ don't contain the interesting chunks in Step i for $i = 1, \dots, N$.
 - 11: Until peer i receives all interesting chunks and finishes downloading.
 - 12: **end for**
-

The optimal network resource allocation for this routing-based scheme can be obtained by the convex optimization of minimizing $\sum_{i=1}^N W_i B / r_i$ subject to the constraints (81) (82),

nodes' uplink and downlink constraints, and the flow rate expression

$$r_i = \sum_{j=1, j \neq i}^N r_{j \rightarrow i} + r_{s \rightarrow i}^{(1)} + r_{i \rightarrow i-1}, \quad i = 1, \dots, N,$$

where $r_{1 \rightarrow 0} = r_{s \rightarrow 1}^{(2)}$. The complexity for the interior point method to solve the problem is $O((N^2)^{3.5})$. For the case of $W_i = 1$ and $D_i = \infty$, the optimal network resource allocation is the same as that of Mutualcast. For the case of $W_i = 1$ or $U_s + \sum_{i=1}^N U_i \geq \sum_{i=1}^N \tilde{D}_i$, by Theorem 2 and Corollary 1, Algorithm 3 provides the optimal network resource allocation.

For general cases with $U_s + \sum_{i=1}^N U_i < \sum_{i=1}^N \tilde{D}_i$, we provide a suboptimal network resource allocation for this routing-based scheme. Consider the water-filling-type solution in (76). Without loss of generality, assume that $\tilde{r}_1 \geq \dots \geq \tilde{r}_N$, and give the ordering $(1, \dots, N)$ in which the peers finish downloading. First construct the depth-2 trees with rates in (55) and (56), where c is still chosen to be the largest possible value satisfying (57) (58) and (77). After constructing the depth-2 trees, the effective flow rate to peer i is

$$\beta_i = \sum_{j=1, j \neq i}^N r_{j \rightarrow i} + r_{i \rightarrow i-1} \quad (83)$$

$$= c(\alpha \tilde{r}_i + \frac{\tilde{r}_{i-1} - \tilde{r}_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} U_i), \quad (84)$$

where $\tilde{r}_0 \triangleq \tilde{r}_1$. The download rate (used downlink) for peer i is $c(\alpha \tilde{r}_i + \frac{\tilde{r}_1 - \tilde{r}_i}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} U_i)$. Note that the effective flow rate is smaller than the download rate for peer i . This is because peer i only keeps a subset of chunks received from the source node. For this reason, parts of peer i 's downlink and the source node's uplink are wasted. The total amount of the wasted uplink is

$$U_w = c \sum_{i=1}^N \frac{\tilde{r}_1 - \tilde{r}_{i-1}}{\sum_{k=1}^N \tilde{r}_k - \tilde{r}_i} U_i. \quad (85)$$

The used source node's uplink is $c\alpha \tilde{r}_1$. If $c\alpha \tilde{r}_1 < U_s$, we can further use the rest of the

source node's uplink to distribute content through the depth-1 tree. The constraints on the resource allocation for the depth-1 tree are (81),

$$r_{s \rightarrow i}^{(1)} \leq D_i - \beta_i, \forall i = 1, \dots, N, \quad (86)$$

and

$$\sum_{i=1}^N r_{s \rightarrow i}^{(1)} \leq U_s - c\alpha\tilde{r}_1. \quad (87)$$

Let $\hat{W}_i = \min_{k \leq i}(W_k)$. Let $\hat{D}_i = \min_{k \leq i}(\tilde{D}_k - \beta_k)$. A sub-optimal network resource allocation for the depth-1 tree is

$$r_{s \rightarrow i}^{(1)} = \begin{cases} \sqrt{\hat{W}_i} \cdot R - \beta_i, & \text{if } \beta_i \leq \sqrt{\hat{W}_i} \cdot R \leq \hat{D}_i, \\ 0 & \text{if } \sqrt{\hat{W}_i} \cdot R < \beta_i, \\ \hat{D}_i - \beta_i, & \text{if } \sqrt{\hat{W}_i} \cdot R > \hat{D}_i, \end{cases} \quad (88)$$

and $r_i = r_{s \rightarrow i}^{(1)} + \beta_i$, where R is chosen such that

$$\sum_{i=1}^N r_{s \rightarrow i}^{(1)} = U_s - c\alpha\tilde{r}_1$$

and also

$$\sum_{i=1}^N r_i = U_s + c \sum_{i=1}^N U_i - U_w.$$

The complexity of calculating the suboptimal resource allocation for the routing-based scheme is $O(N^2)$.

E. Simulations for the Static Scenario

This subsection provides the empirical WSDT performances of the rateless-coding-based scheme, the routing-based scheme, and compares them with the lower bound to the WSDT. In all simulations, the file size B is normalized to be 1. This subsection shows simulations

for 6 cases of network settings as follows:

- Case I: $U_i = 1, D_i = \infty$ for $i = 1, \dots, N$;
- Case II: $U_i = 1, D_i = 8$ for $i = 1, \dots, N$;
- Case III: $U_i = i/N, D_i = \infty$ for $i = 1, \dots, N$;
- Case IV: $U_i = i/N, D_i = 8i/N$ for $i = 1, \dots, N$;
- Case V: $U_i = 1 + 9\delta(i > N/2), D_i = \infty$ for $i = 1, \dots, N$;
- Case VI: $U_i = 1 + 9\delta(i > N/2), D_i = 8i/N, i = 1, \dots, N$;

where $\delta(\cdot)$ is the indicate function.

Consider small P2P networks with $N = 10$ peers. The performances of sum download time versus U_s for these 6 cases are shown in Fig. 7. The performances of WSDT versus U_s with weight $W_i = i/N$ ($i = 1, \dots, N$) are shown in Fig. 8. The performances of WSDT versus U_s with weight $W_i = 1 + \delta(i > N/2)$ ($i = 1, \dots, N$) are shown in Fig. 9. In all these simulations, the weighted sum download times of the rateless-coding-based scheme and the routing-based scheme achieve or almost achieve the lower bound.

Consider large P2P networks with $N = 1000$ peers. The performances of sum download time versus U_s for these 6 cases are shown in Fig. 10. The performances of WSDT versus U_s with weight $W_i = i/N$ ($i = 1, \dots, N$) are shown in Fig. 11. The performances of WSDT versus U_s with weight $W_i = 1 + \delta(i > N/2)$ ($i = 1, \dots, N$) are shown in Fig. 12. In all these simulations, the weighted sum download times of the rateless-coding-based scheme and the routing-based scheme also achieve or almost achieve the lower bound.

We also simulated for many other network settings and weight settings. In all these simulations, the rateless-coding-based scheme achieves or almost achieves the lower bound to the WSDT. Hence, the lower bound to the WSDT is empirically tight, and the rateless-coding-based scheme has almost-optimal empirical performance. The routing-based scheme also has near-optimal empirical performance. However, for few cases there are clear differences between the performance of the routing-based scheme and the lower bound.

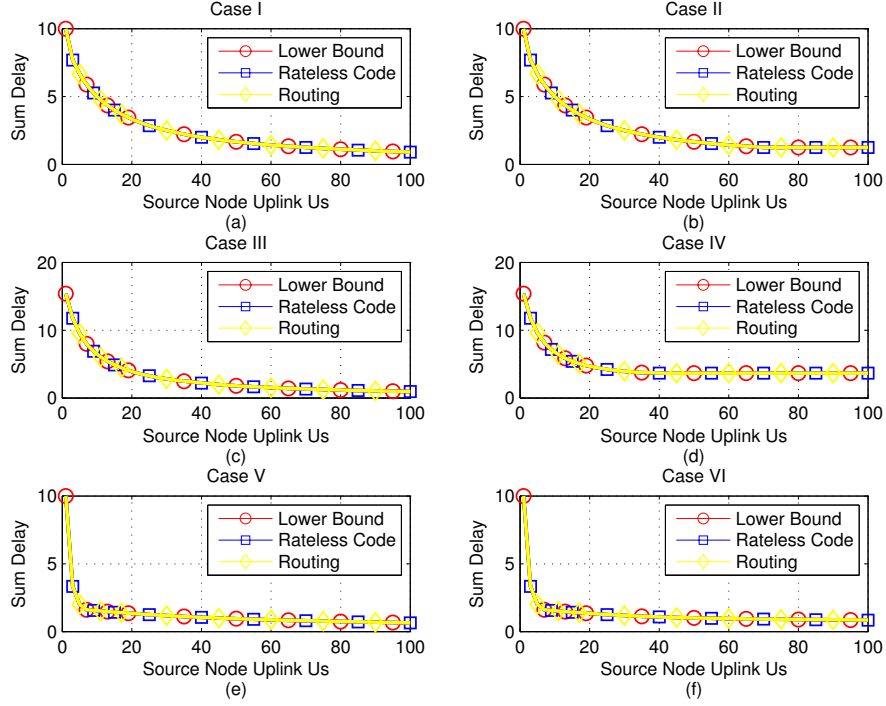


Fig. 7

SUM DOWNLOAD TIME VERSUS U_s FOR SMALL P2P NETWORKS WITH $N = 10$ PEERS.

VI. THE DYNAMIC SCENARIO

The dynamic scenario is allowed to re-allocate the network resource during the file transfer, in particular, whenever a peer finishes downloading, joins into the network, or leaves from the network.

A. A Piece-wise Static Approach to the General Dynamic Case

Wu et al. [27] show that to optimize WSDT the network resource allocation should be dynamic, but may remain constant during any “epoch”, a period of time between when one receiver finishes downloading and another finishes downloading. Thus, one optimal solution for the dynamic scenario is “piecewise static”.

As an example of how a “piecewise static” dynamic allocation can reduce the WSDT, consider the example for which we studied static allocations in Section III-A. Recall that

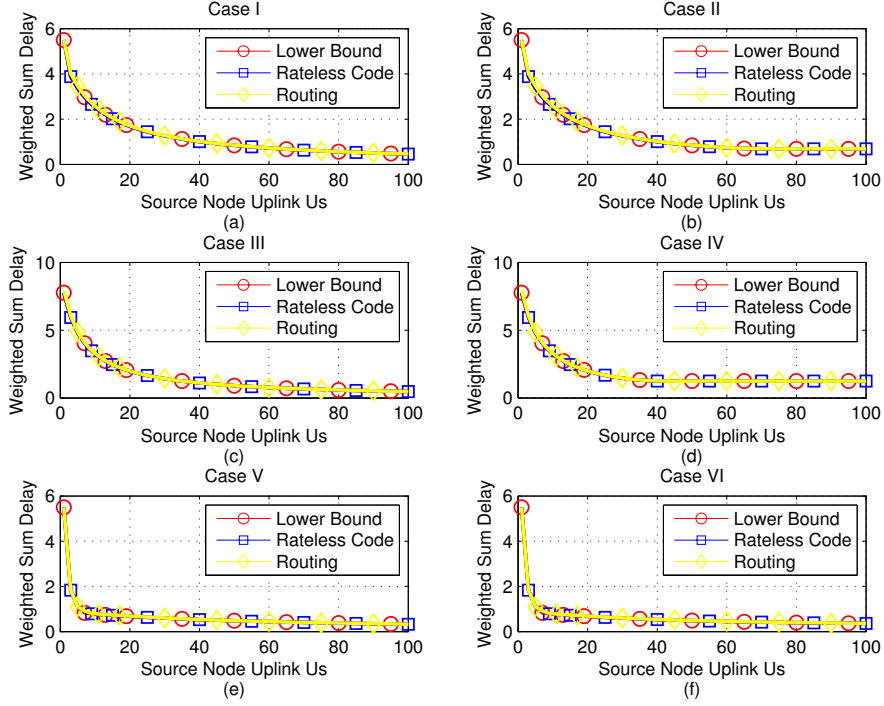


Fig. 8

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR SMALL P2P NETWORKS WITH $N = 10$ PEERS AND WEIGHT $W_i = i/N$.

the example was for a P2P network with $U_S = 2$, $B = 1$ and three peers $\{1, 2, 3\}$ with $U_1 = U_2 = U_3 = 1$ and $D_1 = D_2 = D_3 = \infty$. Fig. 13 shows the time-expanded graph corresponding to the optimal dynamic rate allocation for this example. Because there are three peers, this time-expanded graph describes a file transfer scenario with 3 epochs. The first epoch lasts 0.5 unit time. In the first epoch, the source node sends half of the file to peer 1 and the other half to peer 2. Peer 1 and peer 2 exchange their received content, and hence, both peer 1 and peer 2 finish downloading at the same time. Hence, the second epoch lasts 0 time units (since $t_2 - t - 1 = 0$). The third epoch lasts 0.25 unit time, in which the source node, peer 1 and peer 2 transmits to peer 3 simultaneously. Peer 1 sends a quarter of the file. Peer 2 sends another quarter. The source node sends the other two quarters.

This dynamic solution turns out to achieve the minimum possible sum download time for

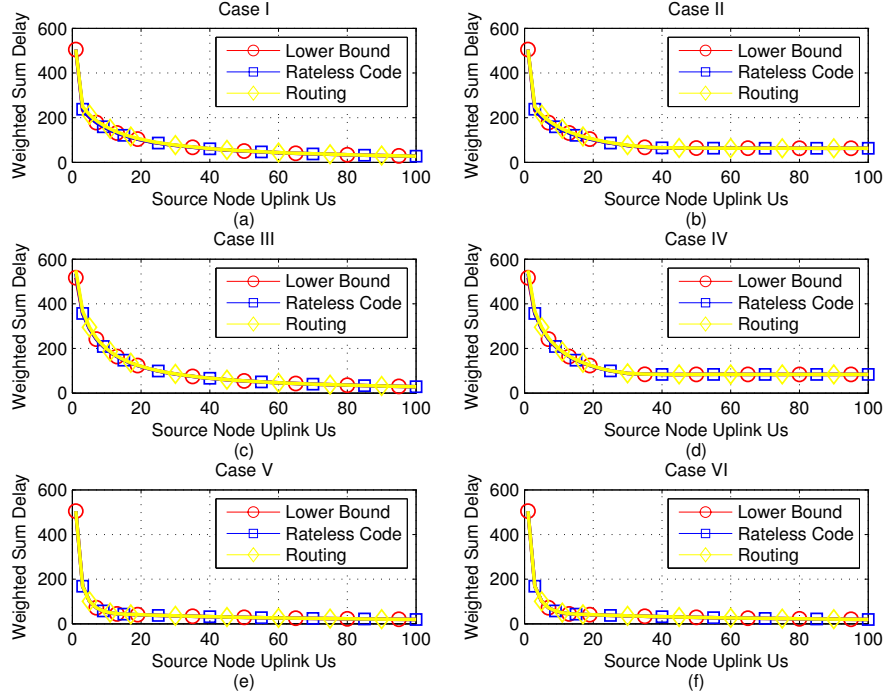


Fig. 9

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR SMALL P2P NETWORKS WITH $N = 10$ PEERS AND WEIGHT $W_i = 1 + 99\delta(i > N/2)$.

this example which is 1.75. For comparison, the optimal static solution, which we saw in Section III-A had an only slightly larger sum download time of 1.8. This simple example shows that a dynamic rate allocation can reduce WSDT. In certain cases the benefit can be significant. Dynamic schemes can reduce the minimum sum download time to approximately half that of the static case, at least when downlink capacities are considered to be infinite [27].

B. A Rateless-coding Approach to Dynamic Allocation

Wu et al. [27] propose a dynamic routing-based scheme. This scheme first deploys all uplink resource to fully support the first K peers until they finish downloading, where K is appropriately chosen. After that, the scheme deploys all uplink resource to fully support the next peer until it finishes downloading, and so forth. Inspired by the work [27], we propose a

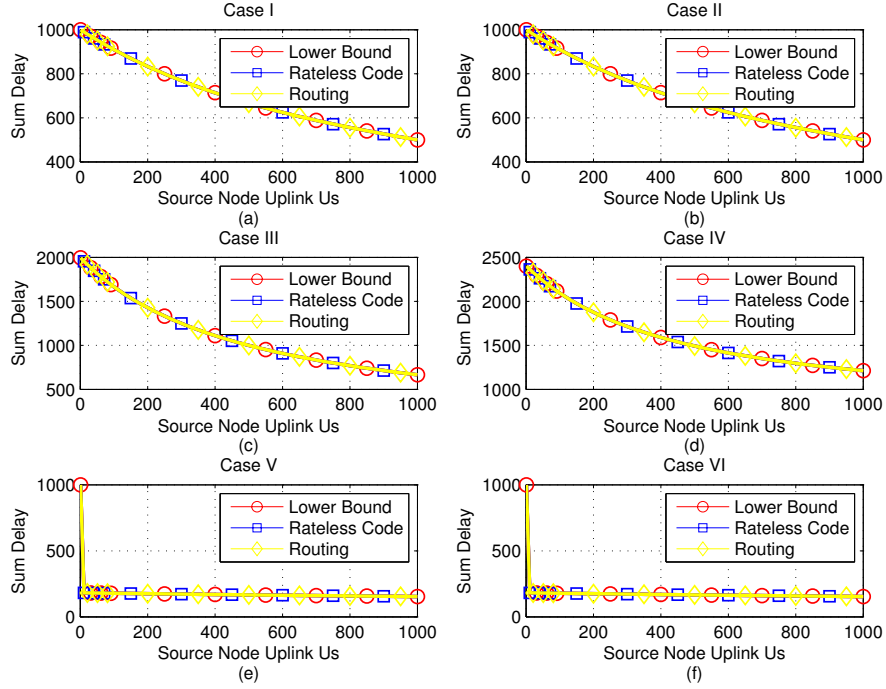


Fig. 10

SUM DOWNLOAD TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 1000$ PEERS.

dynamic rateless-coding-based scheme for P2P networks with both peer uplink bandwidth constraints and peer downlink bandwidth constraints. This scheme is applicable for dynamic P2P networks in which peers may even join or leave the network.

The key idea of this dynamic rateless-coding-based scheme is similar to that of the dynamic routing-based scheme in [27]. In particular, in each epoch, the scheme deploys all uplink resource to fully support several chosen peers. The details of the dynamic rateless-coding-based scheme are provided in Algorithm 6.

Algorithm 6 provides the structure of the dynamic rateless-coding-based scheme. Because the peers always receive independently generated rateless coded chunks in the static rateless-code scheme, the dynamic rateless-coding-based scheme is also applicable for dynamic P2P network. As long as a peer receives enough rateless coded chunks ¹, it can decode the whole

¹The number of coded chunks needed to decode the whole file is only slightly larger than the total number of the original chunks.

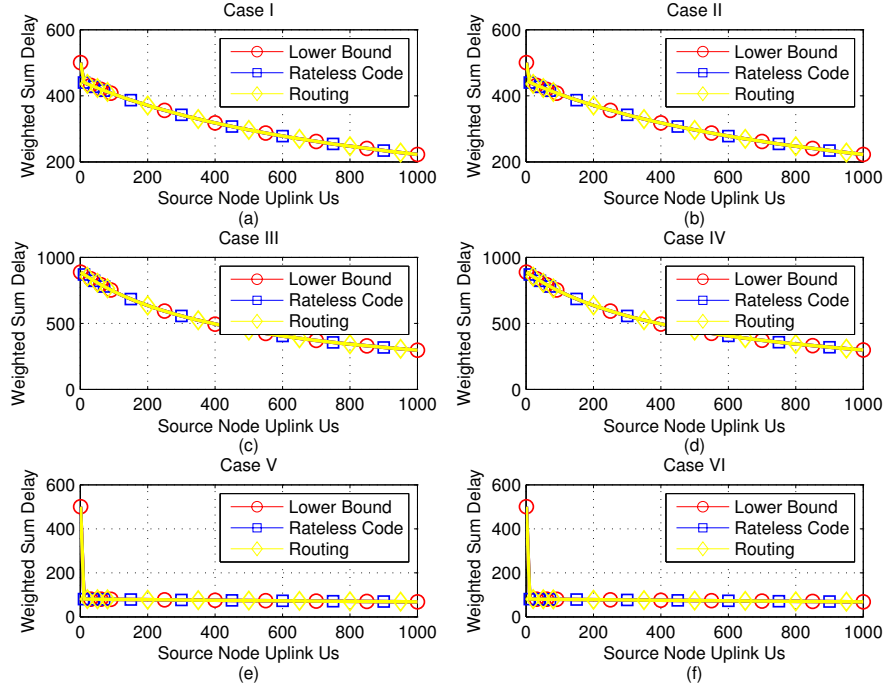


Fig. 11

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 1000$ PEERS
AND WEIGHT $W_i = i/N$.

Algorithm 6 Dynamic Rateless-Coding-Based Scheme

- 1: Initiate the P2P network. Peers join into the network.
 - 2: **while** A peer finishes downloading, joins into the network or leaves from the network
 do
 - 3: Select a set of peers and reset peers' weights. (The peer selection algorithm and the weight setting are addressed in Section VI-C)
 - 4: Apply the static rateless-coding-based scheme based on the new weights until a peer finishes downloading, joins into the network or leaves from the network.
 - 5: **end while**
-

file. The key issue is how to set the peers' weights in each epoch. Since the weight setting and the static rateless-coding-based scheme in the current epoch will influence the dynamic scheme in the following epoches, the problem of setting weights is very complicated. We will address this problem in Section VI-C and show that this problem is approximately equivalent to selecting a set of peers to fully support.

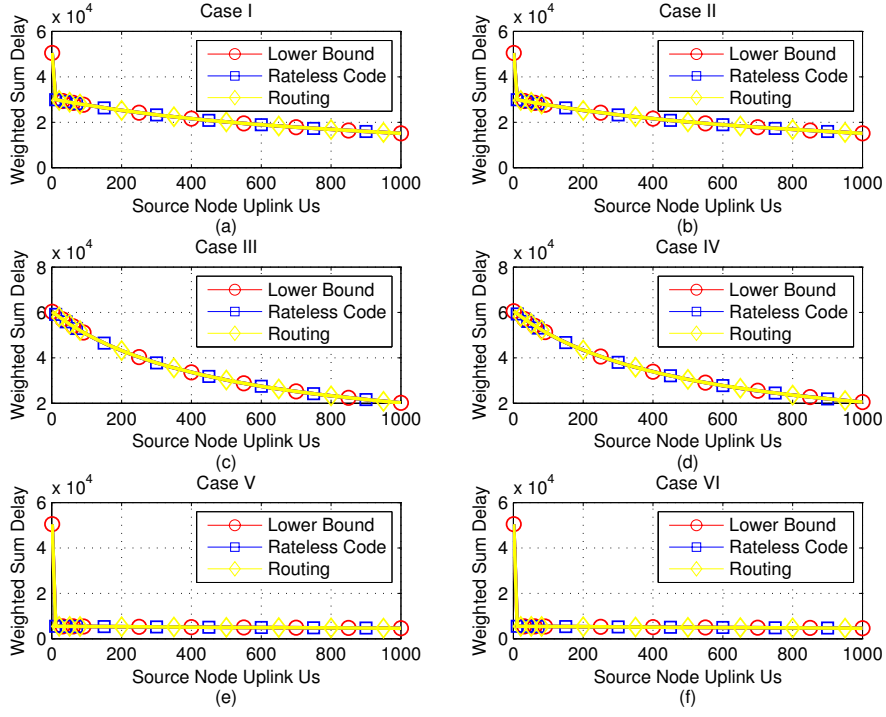


Fig. 12

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 1000$ PEERS
AND WEIGHT $W_i = 1 + 99\delta(i > N/2)$.

C. A Solution to the Ordering Problem

Wu et al. [27] demonstrate that given an order in which the receivers finish downloading, the dynamic allocation (neglecting downlink bandwidth constraints) that minimizes WSDT can be obtained in polynomial time by convex optimization and can be achieved through linear network coding. However, [27] leaves the proper selection of the ordering as an open problem and does not address the finite downlink capacities $D_i < \infty$ or the general case of weighted sum download time which allows any values of the weights W_i .

The simulations for the static scenario in Section V-E show that the WSDT of static rateless-coding-based schemes are very close to that of the lower bound (27, 29). Hence, the flow rates r_i in (27) are achievable or almost achievable by the static rateless-coding-based

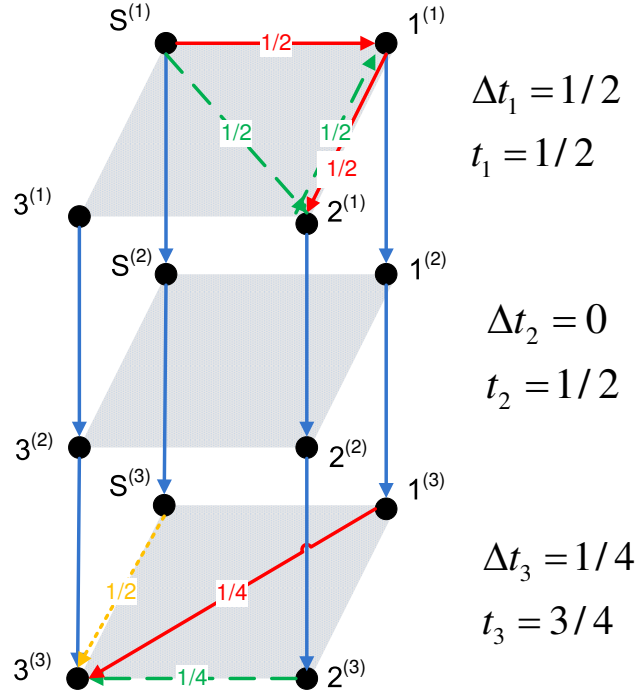


Fig. 13

A TIME-EXPANDED GRAPH FOR A P2P NETWORK WITH THREE PEERS WHERE $U_S = 2$, $B = 1$, $U_1 = U_2 = U_3 = 1$ AND $D_1 = D_2 = D_3 = \infty$. EDGES ARE LABELED WITH THE TOTAL INFORMATION FLOW ALONG THE EDGE DURING THE EPOCH. THIS IS THE PRODUCT OF THE RATE ALLOCATION ALONG THE EDGE DURING THE EPOCH AND THE DURATION OF THE EPOCH.

scheme. Recall that the constraints on the rate r_i in (27) are

$$0 \leq r_i \leq \tilde{D}_i, \quad \forall i = 1, \dots, N,$$

and

$$\sum_{i=1}^N r_i \leq U_s + \sum_{i=1}^N U_i.$$

In the following discussion, we assume that any set of flow rates r_i ($i = 1, \dots, N$) satisfying the above constraints is achievable by the static rateless-coding-based scheme.

Consider one epoch of the dynamic rateless-coding-based scheme. Suppose there are N peers in the network in the current epoch. Peer i ($i = 1, \dots, N$) has uplink capacity

U_i , downlink capacity D_i and $B - q_i B$ received rateless-coded chunks. Suppose the static rateless-coding-based scheme supports peer i with flow rate r_i ($i = 1, \dots, N$) based on a weight setting. In order to find the optimal weight setting for the current epoch, we study the necessary conditions for the flow rates r_i ($i = 1, \dots, N$) to be optimal.

Let us first focus on two peers in the network, say peer 1 and peer 2. The total amount of the uplink resource supporting peer 1 and peer 2 is $s = r_1 + r_2$. If the flow rates r_i for $i = 1, \dots, N$ is optimal, then the flow rates r_1 and r_2 are also the optimal resource allocation for peers 1 and 2 given that the flow rates r_i for $i = 3, \dots, N$ are fixed. Now consider a suboptimal scenario in which the uplink resource with the amount of s serves peers 1 and 2, and the rest of the uplink serves other peers in all of the following epoches. This suboptimal scenario provides a WSDT close to the minimum WSDT if $s \ll U_s + \sum_{i=1}^N U_i$ (this is true for large N). Hence, we consider this suboptimal scenario and address the necessary conditions for r_1 and r_2 to be the optimal resource allocation for peers 1 and 2.

If $\frac{q_1 B}{r_1} \leq \frac{q_2 B}{r_2}$, then peer 1 finishes downloading before peer 2 does. After peer 1 finishes downloading, peer 1 acts as a source node and hence the total amount of the source nodes' uplink is $U_s + U_1$, and peer 2 is supported by the uplink resource with the amount of s . Hence, the WSDT for peers 1 and 2 is

$$\Delta_1 = W_1 \frac{q_1 B}{r_1} + W_2 \left(\frac{q_1 B}{r_1} + \frac{q_2 B - \frac{q_1 B}{r_1} r_2}{\min(s, D_2, U_s + U_1)} \right), \quad (89)$$

and

$$\frac{\Delta_1}{r_1} = \frac{q_1 B}{r_1^2} (-W_1 - W_2 + \frac{s W_2}{\min(s, D_2, U_s + U_1)}). \quad (90)$$

Note that the sign of $\frac{\Delta_1}{r_1}$ does not depend on r_1 . Hence, the optimal solution to r_1 is either $r_1 = r_2 q_1 / q_2$ (peer 1 and peer 2 finish at the same time) if $-W_1 - W_2 + \frac{s W_2}{\min(s, D_2, U_s + U_1)} \geq 0$, or $r_1 = \min(s, \tilde{D}_1)$ (peer 1 is fully supported) if $-W_1 - W_2 + \frac{s W_2}{\min(s, D_2, U_s + U_1)} < 0$. Similarly, if $\frac{q_1 B}{r_1} \geq \frac{q_2 B}{r_2}$, then peer 2 finishes downloading before peer 1 does. The WSDT for peers 1

and 2 is

$$\Delta_2 = W_2 \frac{q_2 B}{r_2} + W_1 \left(\frac{q_2 B}{r_2} + \frac{q_1 B - \frac{q_2 B}{r_2} r_1}{\min(s, D_1, U_s + U_2)} \right), \quad (91)$$

and

$$\frac{\Delta_2}{r_2} = \frac{q_2 B}{r_2^2} (-W_2 - W_1 + \frac{s W_1}{\min(s, D_1, U_s + U_2)}). \quad (92)$$

Note that the sign of $\frac{\Delta_2}{r_2}$ does not depend on r_2 either. Hence, the optimal solution to r_2 is either $r_2 = r_1 q_2 / q_1$ (peer 1 and peer 2 finish at the same time) if $-W_2 - W_1 + \frac{s W_1}{\min(s, D_1, U_s + U_2)} \geq 0$, or $r_2 = \min(s, \tilde{D}_2)$ (peer 2 is fully supported) if $-W_2 - W_1 + \frac{s W_1}{\min(s, D_1, U_s + U_2)} < 0$. Therefore, the optimal resource allocation for peer 1 and peer 2 is achieved when one of the peers is fully supported, or they finish at the same time.

Lemma 4: Given that the flow rates to peer i for $i = 3, \dots, N$ are fixed, and the amount of uplink resource supporting peer 1 and peer 2 is s . If the optimal resource allocation for peer 1 and peer 2 is achieved when they finish at the same time, then both peer 1 and peer 2 are fully supported.

Proof: Let $\tilde{D}_1^+ = \min(s, D_1, U_s + U_2)$ and $\tilde{D}_2^+ = \min(s, D_2, U_s + U_1)$. According to the above discussion, the optimal resource allocation for peer 1 and peer 2 is achieved when they finish at the same time if and only if $s \geq \tilde{D}_1 + \tilde{D}_2$, or $\frac{\Delta_1}{r_1} \geq 0$ and $\frac{\Delta_2}{r_2} \geq 0$.

If $s \geq \tilde{D}_1 + \tilde{D}_2$, then $r_1 = \tilde{D}_1$, $r_2 = \tilde{D}_2$, and hence, peers 1 and 2 are fully supported.

If $\frac{\Delta_1}{r_1} \geq 0$ and $\frac{\Delta_2}{r_2} \geq 0$, then

$$-W_1 - W_2 + \frac{s W_2}{\tilde{D}_2^+} \geq 0,$$

and

$$-W_2 - W_1 + \frac{s W_1}{\tilde{D}_1^+} \geq 0$$

. Hence, $0 \leq W_1 \leq \frac{s - \tilde{D}_2^+}{\tilde{D}_2^+} W_2$ and $0 \leq W_2 \leq \frac{s - \tilde{D}_1^+}{\tilde{D}_1^+} W_1$. Multiply the above two inequalities and obtain

$$s \geq \tilde{D}_1^+ + \tilde{D}_2^+ \geq \tilde{D}_1 + \tilde{D}_2.$$

Therefor, peer 1 and peer 2 are also fully supported. ■

Corollary 2: Given that the flow rates to peer i for $i = 3, \dots, N$ are fixed, and the amount of uplink resource supporting peer 1 and peer 2 is s . The optimal resource allocation for peer 1 and peer 2 is achieved when one of them is fully supported or both of them are fully supported.

Corollary 3: The optimal network resource allocation in each epoch of a dynamic scenario is only obtained when some peers are fully supported, at most one peer is partially supported, and the other peers are not supported.

Proof: (**proof by contradiction**) If two peers are partially supported, say peer 1 and peer 2 are partially supported, then the resource allocation for peer 1 and peer 2 is not optimal by Corollary 2. ■

By Corollary 3, the optimal weight setting in each epoch is $W = 1$ for the fully supported peers, $0 \leq W \leq 1$ for the partially supported peer, and $W = 0$ for other peers. Hence, the problem of optimizing the weight setting is approximately equivalent to selecting a set of peers to fully support.

Now study the necessary conditions for a peer selection to be optimal in a similar way. Suppose that the amount of uplink resource supporting peer 1 and peer 2 is s , and the flow rates to peer i for $i = 3, \dots, N$ are fixed.

If $s < \frac{q_1+q_2}{q_1} \tilde{D}_1$ and $s < \frac{q_1+q_2}{q_2} \tilde{D}_2$, then peer 1 finishes downloading if peer 1 is fully supported, or peer 2 finishes downloading if peer 2 is fully supported. When peer 1 is fully supported, the WSDT for peer 1 and peer 2 is Δ_1 in (89) with $r_1 = \tilde{D}_1$. When peer 2 is fully supported,

the WSDT for these two peers is Δ_2 in (91) with $r_2 = \tilde{D}_2$. Hence, we have

$$\begin{aligned}\Delta_1 - \Delta_2 &= W_1 \frac{q_1 B}{\tilde{D}_1} + W_2 \left(\frac{q_1 B}{\tilde{D}_1} + \frac{q_2 B - \frac{q_1 B}{\tilde{D}_1} r_2}{\min(s, D_2, U_s + U_1)} \right) \\ &\quad - \left(W_2 \frac{q_2 B}{\tilde{D}_2} + W_1 \left(\frac{q_2 B}{\tilde{D}_2} + \frac{q_1 B - \frac{q_2 B}{\tilde{D}_2} r_1}{\min(s, D_1, U_s + U_2)} \right) \right) \quad (93)\end{aligned}$$

$$\begin{aligned}&= q_1 B W_1 \left(\frac{1}{\tilde{D}_1} - \frac{1}{\tilde{D}_1^+} \right) - q_2 B W_2 \left(\frac{1}{\tilde{D}_2} - \frac{1}{\tilde{D}_2^+} \right) \\ &\quad + q_1 B W_2 \left(\frac{1}{\tilde{D}_2^+} - \frac{1}{\tilde{D}_2} \right) \left(1 - \frac{s}{\tilde{D}_1} \right) \\ &\quad - q_2 B W_1 \left(\frac{1}{\tilde{D}_1^+} - \frac{1}{\tilde{D}_1} \right) \left(1 - \frac{s}{\tilde{D}_2} \right) \\ &\quad + (q_1 B W_2 - q_2 B W_1) \left(\frac{1}{\tilde{D}_1} + \frac{1}{\tilde{D}_2} - \frac{s}{\tilde{D}_1 \tilde{D}_2} \right) \quad (94)\end{aligned}$$

$$\approx \left(\frac{W_2}{q_2} - \frac{W_1}{q_1} \right) \frac{q_1 q_2 B (\tilde{D}_1 + \tilde{D}_2 - s)}{\tilde{D}_1 \tilde{D}_2}. \quad (95)$$

Therefore, it is better to first fully support peer 1 if $\frac{W_2}{q_2} < \frac{W_1}{q_1}$ when $s < \frac{q_1 + q_2}{q_1} \tilde{D}_1$ and $s < \frac{q_1 + q_2}{q_2} \tilde{D}_2$.

If $\frac{q_1}{\tilde{D}_1} > \frac{q_2}{\tilde{D}_2}$ and $\frac{q_1 + q_2}{q_1} \tilde{D}_1 < s < \frac{q_1 + q_2}{q_2} \tilde{D}_2$, then peer 2 always finishes downloading before peer 1 does. In this case, it is better to first fully support peer 1 if $\frac{\Delta_2}{r_2} > 0$, i.e.,

$$\frac{W_1}{W_2} > \frac{\tilde{D}_1^+}{s - \tilde{D}_1^+},$$

or approximately

$$\frac{W_1}{W_2} > \frac{\tilde{D}_1}{s - \tilde{D}_1}.$$

If $\frac{q_1}{\tilde{D}_1} < \frac{q_2}{\tilde{D}_2}$ and $\frac{q_1 + q_2}{q_2} \tilde{D}_2 < s < \frac{q_1 + q_2}{q_1} \tilde{D}_1$, then peer 1 always finishes downloading before peer

2 does. In this case, it is better to first fully support peer 1 if $\frac{\Delta_1}{r_1} < 0$, i.e.,

$$\frac{W_1}{W_2} > \frac{\tilde{D}_2^+}{s - \tilde{D}_2^+},$$

or approximately

$$\frac{W_1}{W_2} > \frac{\tilde{D}_2}{s - \tilde{D}_2}.$$

These discussions are concluded in the following theorem.

Theorem 4: Given that the amount of uplink resource supporting peer i and peer j is s , and the flow rates to peer k for $k \neq i, j$ are fixed. The optimal resource allocation for peer i and peer j is to fully support peer i (i.e., $r_i = \tilde{D}_i$) if

$$\frac{W_i}{W_j} > \begin{cases} \max(\frac{q_i}{q_j}, \frac{s - \tilde{D}_j}{\tilde{D}_j}) & \text{when } \frac{q_i}{\tilde{D}_i} < \frac{q_j}{\tilde{D}_j}, \\ \frac{1}{\max(\frac{q_j}{q_i}, \frac{s - \tilde{D}_i}{\tilde{D}_i})} & \text{when } \frac{q_i}{\tilde{D}_i} > \frac{q_j}{\tilde{D}_j}. \end{cases} \quad (96)$$

Corollary 4: Consider a peer selection for a dynamic scenario which selects peer i to fully support and peer j to not support. This peer selection is optimal only if

$$\frac{W_i}{W_j} > \begin{cases} \max(\frac{q_i}{q_j}, \frac{\tilde{D}_i - \tilde{D}_j}{\tilde{D}_j}) & \text{when } \frac{q_i}{\tilde{D}_i} < \frac{q_j}{\tilde{D}_j}, \\ \frac{q_i}{q_j} & \text{when } \frac{q_i}{\tilde{D}_i} > \frac{q_j}{\tilde{D}_j}. \end{cases} \quad (97)$$

Proof: When peer i is fully supported and peer j is not supported, $s = r_i + r_j = \tilde{D}_i$. Plugging $s = \tilde{D}_i$ into (96) and obtain (97). ■

Define the binary relation $\succ$ on $\{1, \dots, N\}$ as $i \succ j$ if (97) is satisfied. Denote a peer selection as (I, J) where I is the set of fully supported peers and J is the set of unsupported peers. (I, J) is optimal only if $i \succ j$ for any $i \in I$ and $j \in J$. For general P2P networks, finding the optimal (I, J) is computational impossible because the binary relation $\succ$ is not transitive, which means

$$i \succ j; j \succ k \not\Rightarrow i \succ k.$$

Define the binary relation $\approx$ on $\{1, \dots, N\}$ as $i \approx j$ if $\frac{W_i}{q_i} \geq \frac{W_j}{q_j}$. The binary relation $\approx$ is an approximation to the binary relation $\succ$. $i \approx j$ is equivalent to $i \succ j$ when

$$\frac{q_i}{q_j} > \frac{\tilde{D}_i - \tilde{D}_j}{\tilde{D}_j}. \quad (98)$$

It can be seen by plugging (98) into (97). The approximated binary relation $\approx$ has the transitive property, and hence, the peers can be ordered with respect to $\approx$. Based on this ordering, a suboptimal peer selection algorithm and the corresponding weight setting is constructed as shown in Algorithm 7.

Algorithm 7 Peer Selection and Weight Setting

- 1: Suppose N peers are downloading in the current epoch.
 - 2: Let $B - q_i B$ ($0 < q_i \leq 1$) be the number of chunks that peer i has received for $i = 1, \dots, N$.
 - 3: Sort $\{\frac{W_i}{q_i}\}_{i=1}^N$ in descending order and get $(k_1, \dots, k_N)$.
 - 4: Find the smallest M such that $\sum_{i=1}^M \tilde{D}_{k_i} \geq U_s + \sum_{i=1}^N U_i$.
 - 5: Select peers $\{k_i\}_{i=1}^M$ to fully support.
 - 6: Set $W_j = 1$ if $j \in \{k_i\}_{i=1}^M$, or $W_j = 0$ otherwise.
-

VII. SIMULATIONS OF THE DYNAMIC SCENARIO

The dynamic rateless-coding-based scheme is feasible to both static P2P networks and dynamic P2P networks. Consider a type of dynamic P2P networks which any peer leaves from as it finishes downloading, and no peer joins into. This section provides the empirical WSDT performances of the dynamic rateless-coding-based scheme for static P2P networks and dynamic P2P networks with peer leaving, and compares them with those of the static scenario for static P2P networks. In all simulations, the file size B is normalized to be 1. This section shows simulations for Cases I, II, IV, and VI investigated in V-E.

Consider median-size P2P networks with $N = 100$ peers. The performances of sum download time versus U_s for the 4 cases are shown in Fig. 14. Fig. 15 shows the relative value of the sum download time by normalizing the lower bound to be 1 in order to explicitly compare

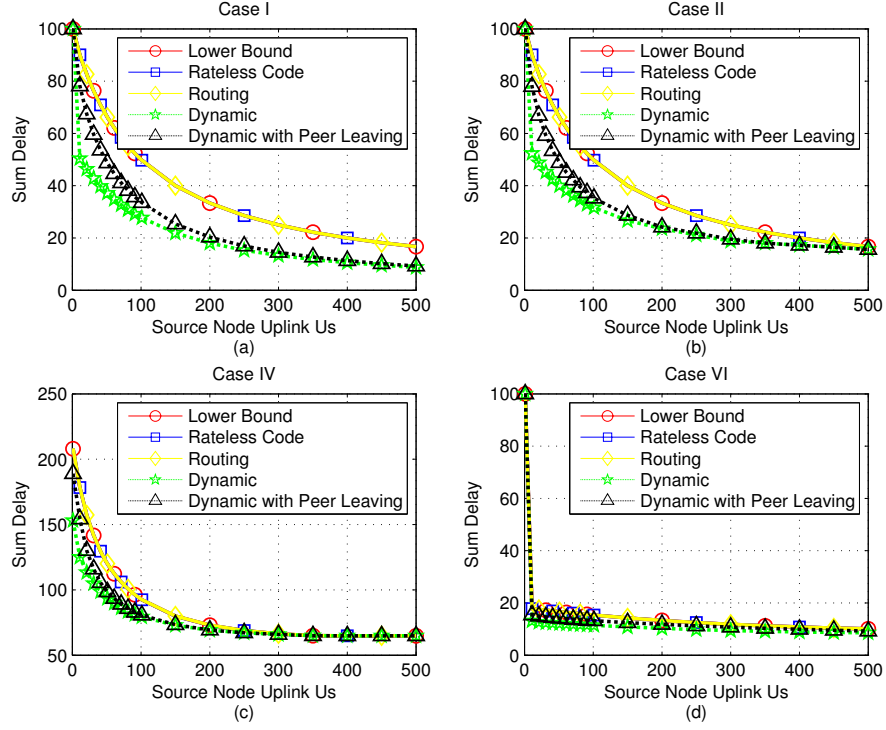


Fig. 14

SUM DOWNLOAD TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS.

the performances of the dynamic rateless-coding-based scheme and the static scenario. For Case I where peers have infinite downlink capacities, the sum download time of the dynamic rateless-coding-based scheme is almost half of the minimum sum download time for the static scenario for a broad range of the source node uplink U_s . This result matches the results in the previous work [27], which says that the minimum sum download time of dynamic scenarios is almost half of the minimum sum download time of static scenarios when node uplinks are the only bottleneck in the network. Our results also show that the sum download time of the dynamic rateless-coding-based scheme with peer leaving decreases to almost half of the minimum sum download time for the static scenario as U_s increases. For Cases II, IV, and VI, the WSDs of the dynamic scheme and the dynamic scheme with peer leaving are also always smaller than the minimum WSDT for the static scenario. In particular, the WSDT of the dynamic scheme can be as small as 0.59, 0.70, and 0.73 of the minimum WSDT for

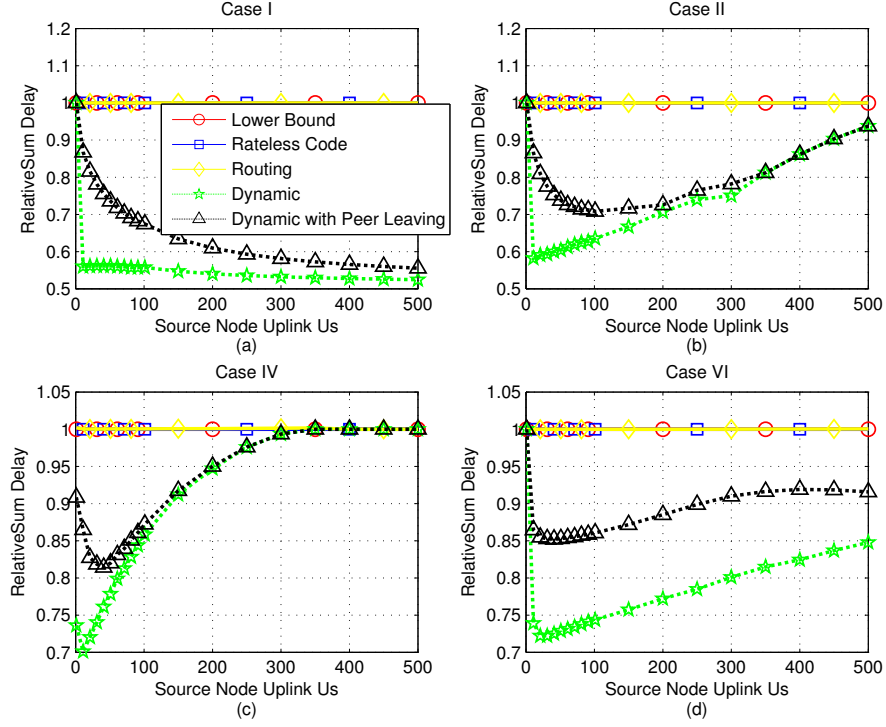


Fig. 15

RELATIVE SUM DOWNLOAD TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS.

the static scenario for Cases II, IV and VI, respectively. The WSDT of the dynamic scheme with peer leaving can be as small as 0.71, 0.82, and 0.86 of the minimum WSDT for static scenarios for Cases II, IV and VI, respectively. These largest improvements in percentage of deploying the dynamic scheme is obtained when the source node can directly support tens of the peers.

The performances of WSDT versus U_s with weight $W_i = i/N$ ($i = 1, \dots, N$) are shown in Fig. 16. Fig. 17 shows the relative value of the WSDT. For Case I, the sum download times of the dynamic rateless-coding-based scheme and the dynamic scheme with peer leaving can be even less than half of the minimum sum download time for the static scenario for a broad range of the source node uplink U_s . This is because the peers with largest weight finish downloading first in the dynamic scheme. The WSDT of the dynamic scheme can be as small as 0.48, 0.49, and 0.58 of the minimum WSDT for the static scenario for Cases II,

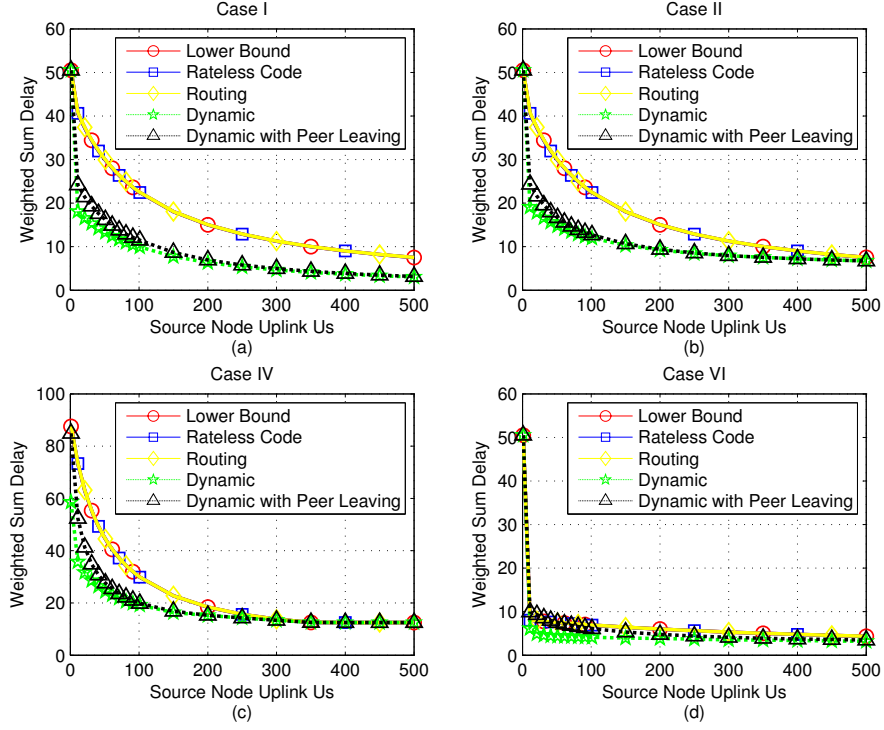


Fig. 16

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS AND WEIGHT $W_i = i/N$.

IV and VI, respectively. The WSDT of the dynamic scheme with peer leaving can be as small as 0.56, 0.62, and 0.77 of the minimum WSDT for the static scenario for Cases II, IV and VI, respectively. Note that for Case VI, the WSDT of the dynamic scheme with peer leaving is larger than that of the static scenario for small U_s . This is because the peers with larger uplink resource also have larger weight, and they finish downloading and leave from the network first.

The performances of WSDT versus U_s with weight $W_i = 1 + 99\delta(i > N/2)$ ($i = 1, \dots, N$) are shown in Fig. 18. Fig. 19 shows the relative value of the WSDT. For Case I, the sum download times of the dynamic rateless-coding-based scheme and the dynamic scheme with peer leaving is around half of the minimum sum download time for the static scenario for a broad range of the source node uplink U_s . The WSDT of the dynamic scheme can be as

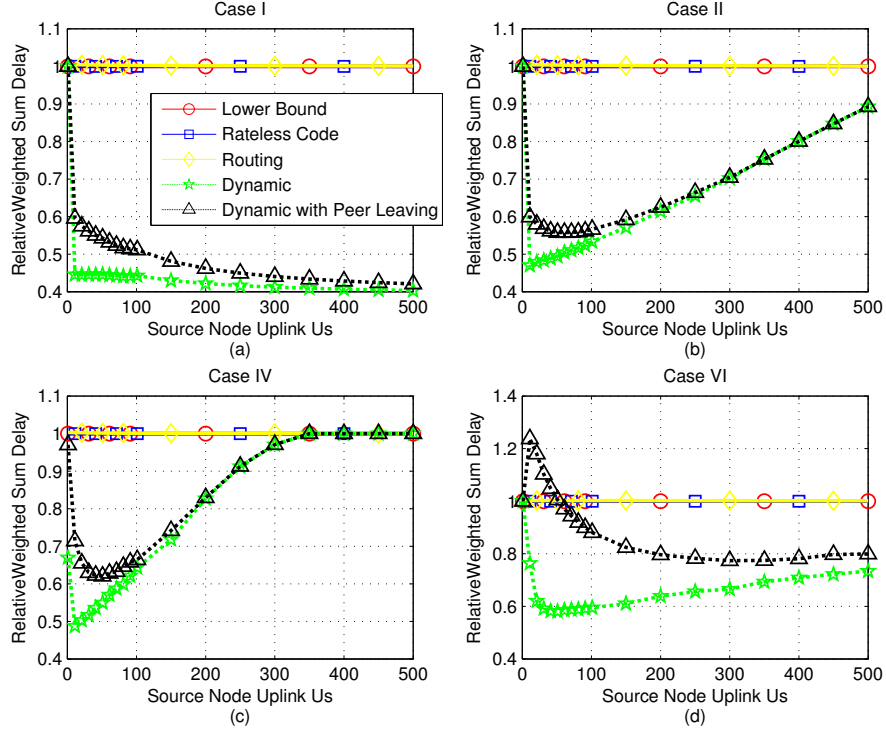


Fig. 17

RELATIVE WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS AND WEIGHT $W_i = i/N$.

small as 0.58, 0.55, and 0.52 of the minimum WSDT for static scenarios for Cases II, IV and VI, respectively. The WSDT of the dynamic scheme with peer leaving can be as small as 0.64, 0.64, and 0.63 of the minimum WSDT for the static scenario for Cases II, IV and VI, respectively. Note that for this weight setting, the WSDT of the dynamic scheme with peer leaving is always smaller than that of the static scenario for Case VI. This is because the gain by finishing peers with larger weight is more than than the loss by the peers with larger uplink resource leaving from the network.

Consider large P2P networks with $N = 1000$ peers. The performances of sum download time versus U_s for the 4 cases are shown in Fig. 14. Fig. 15 shows the relative value of the sum download time. For Case I, the sum download time of the dynamic rateless-coding-based scheme is around 0.55 of the minimum sum download time for the static scenario for a

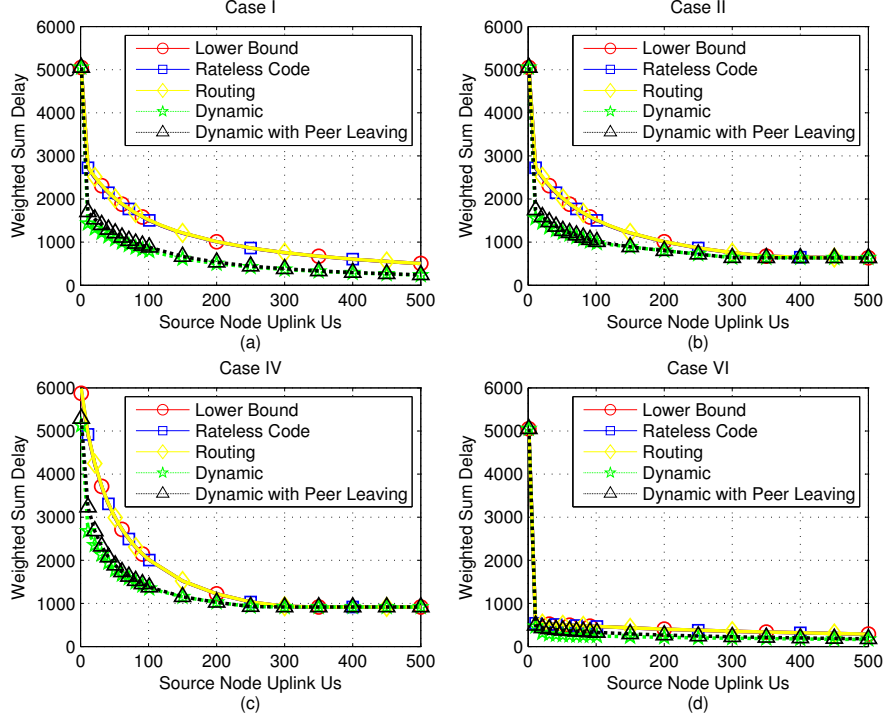


Fig. 18

WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS AND WEIGHT $W_i = 1 + 99\delta(i > N/2)$.

broad range of the source node uplink U_s . The sum download time of the dynamic rateless-coding-based scheme with peer leaving decreases to 0.70 of the minimum sum download time for the static scenario as U_s increases to 1000. The WSDT of the dynamic scheme can be as small as 0.57, 0.70, and 0.70 of the minimum WSDT for the static scenario for Cases II, IV and VI, respectively.

VIII. CONCLUSION

This paper considers the problem of transferring a file from one source node to multiple receivers in a P2P network with both peer uplink bandwidth constraints and peer downlink bandwidth constraints. This paper shows that the static scenario can be optimized in polynomial time by convex optimization, and the associated optimal static WSDT can be

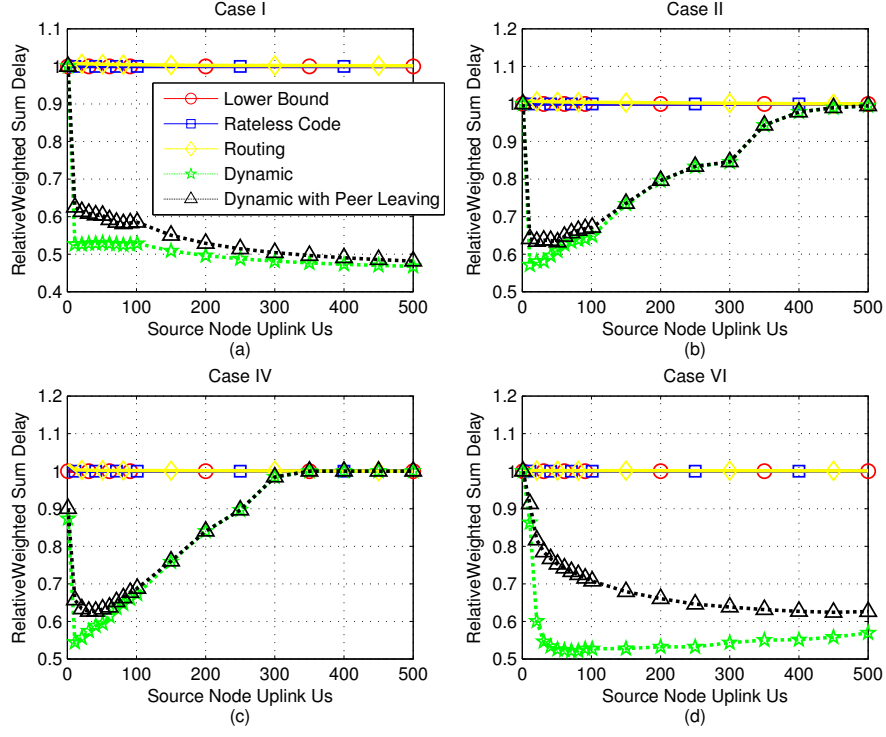


Fig. 19

RELATIVE WEIGHTED SUM DOWNLOADING TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 100$ PEERS AND WEIGHT $W_i = 1 + 99\delta(i > N/2)$.

achieved by linear network coding. Furthermore, this paper proposes static routing-based and rateless-coding-based schemes that closely approach a new lower bound on performance derived in this paper.

This paper also proposes a dynamic rateless-coding-based scheme, which provides significantly smaller WSDT than the optimal static scheme does. A key contribution for the dynamic scenario is a practical solution to the ordering problem left open by Wu. Our solution is to recast this problem as the problem of identifying the peer weights for each epoch of the “piecewise static” rate allocation.

The deployment of rateless codes simplifies the mechanism of the file-transfer scenario, enhances the robustness to packet loss in the network, and increases the performance (without considering packet overhead). However, there still exist several issues for rateless-coding-

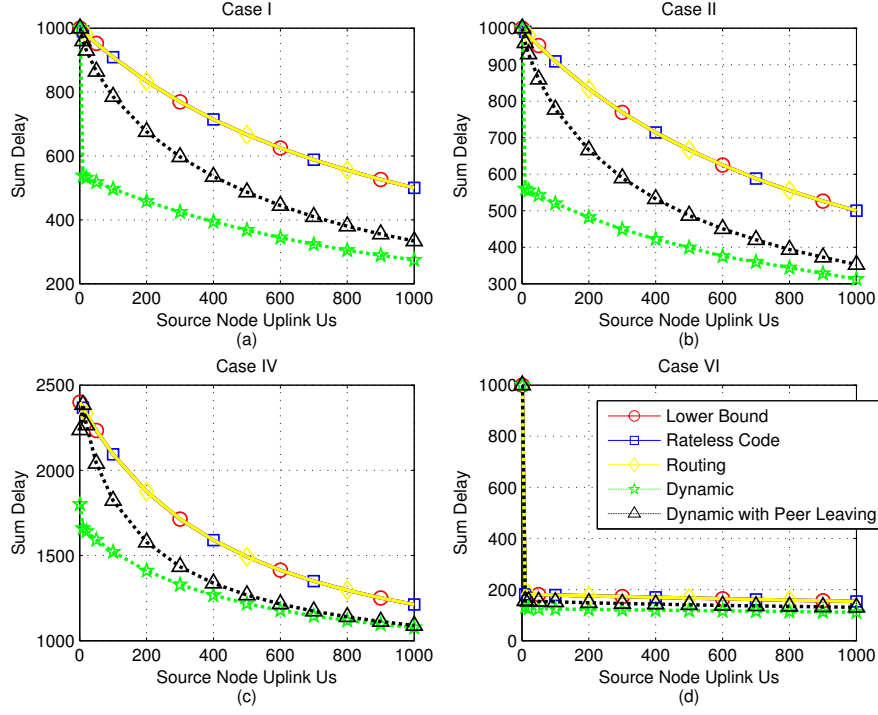


Fig. 20

SUM DOWNLOAD TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 1000$ PEERS.

based scheme such as high source node encoding complexity, packet overhead, and fast peer selection algorithm for the dynamic scenario. The results of this paper open interesting problems in applying rateless codes for P2P applications.

The optimal download time region (set of optimal download times) for one-to-many file transfer in a P2P network can be characterized by a system of linear inequalities. Hence, minimizing the WSDT for all sets of peer weights leads to the download time region. The set of peer weights can also be assigned according to the applications. For instances, for a file transfer application with multiple classes of users, assign a weight to each class of users. For an application with both receivers and helpers, assign weight zero to helpers and positive weights to receivers. Hence, the results of this paper in fact apply directly to one-to-many file transfer applications both with and without helpers.

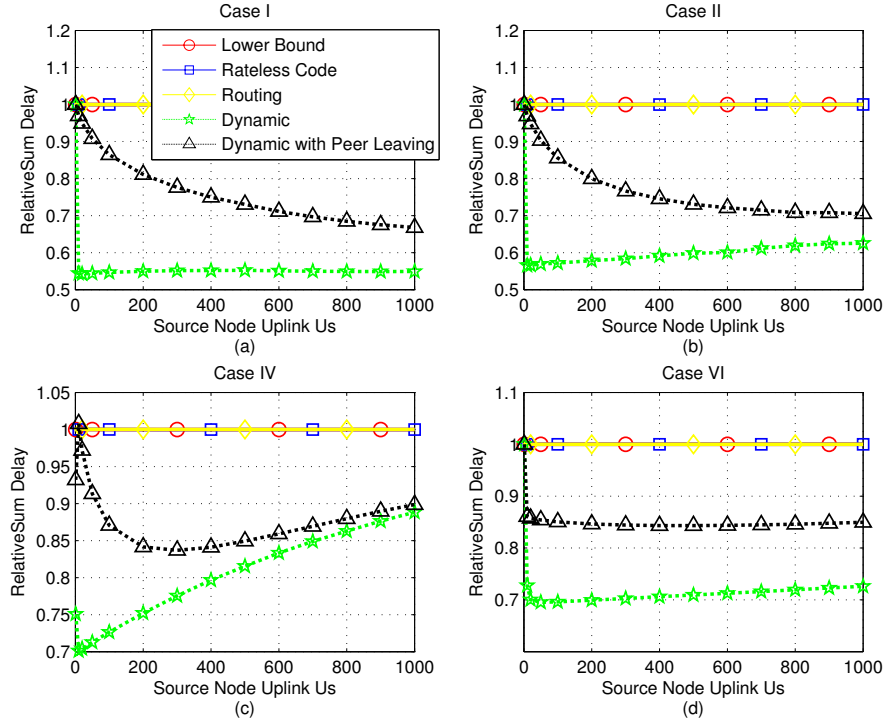


Fig. 21

RELATIVE SUM DOWNLOAD TIME VERSUS U_s FOR LARGE P2P NETWORKS WITH $N = 1000$ PEERS.

REFERENCES

- [1] “BitTorrent.”. [Online]. Available: <http://www.bittorrent.com>.
- [2] “Napster.”. [Online]. Available: <http://www.napster.com>.
- [3] “Gnutella.”. [Online]. Available: <http://www.gnutella.com>.
- [4] “KaZaA.”. [Online]. Available: <http://www.kazaa.com>.
- [5] S. Androutsellis-Theotokis and D. Spinellis. “A survey of peer-to-peer content distribution technologies”. *ACM Compl Surveys*, 36(4):335–371, Dec. 2004.
- [6] J. Liu, S. G. Rao, B. Li, and H. Zhang. “Opportunities and challenges of peer-to-peer internet video broadcast”. *Proceedings of the IEEE, Special Issue on Recent Advances in Distributed Multimedia Communications*, 2007.
- [7] X. Zhang, J. Liu, B. Li, and T. S. P. Yum. “Coolstreaming/donet: A data-driven overlay network for efficient live media streaming”. *in Proc. INFOCOM’05*, 2005.

- [8] V. Pai, K. Kumar, K. Tamilmani, V. Sambamurthy, and A. E. Mohr. “Chainsaw: Eliminating trees from overlay multicast”. in *Proc. 4th Int. Workshop on Peer-to-Peer Systems (IPTPS)*, Feb. 2005.
- [9] J. Li, P. A. Chou, and C. Zhang. “Mutualcast: An Efficient Mechanism for Content Distribution in a Peer-to-Peer (P2P) Network”. *Microsoft Research, MSR-TR-2004-100*, 2004.
- [10] J. Li. “PeerStreaming: A practical receiver-driven peer-to-peer media streaming system”. *Microsoft, Tech. Rep. MSR-TR-2004-101*, Sep. 2004.
- [11] Z. Xiang, Q. Zhang, W. Zhu, Z. Zhang, and Y.-Q. Zhang. “Peer-to-peer based multimedia distribution service”. *IEEE Trans. Multimedia*, 6(2):343–355, Apr. 2004.
- [12] J. Jannotti, D. K. Gifford, K. L. Johnson, M. F. Kaashoek, and J. W. O’Toole. “Overcast: Reliable multicasting with an overlay network”. in *Proc. of the Fourth Symposium of Operating System Design and Implementation (OSDI)*, pages 197–212, Oct. 2000.
- [13] Y. Chu, A. Ganjam, T. S. E. Ng, S. G. Rao, K. Sripanidkulchai, J. Zhan, and H. Zhang. “Early experience with an internet broadcast system based on overlay multicast”. in *Proc. of USENIX*, 2004.
- [14] H. Deshpande, M. Bawa, and H. Garcia-Molina. “Streaming live media over a peer-to-peer network”. *Stanford Univ. Comput. Sci. Dept., Tech. Rep.*, Jun. 2001.
- [15] X. Jiang, Y. Dong, D. Xu, and B. Bhargava. “GnuStream: A P2P media streaming system prototype”. in *Proc. of 4th International Conference on Multimedia and Expo*, Jul. 2003.
- [16] Y. Cui, B. Li, and K. Nahrstedt. “oStream: asynchronous streaming multicast in application-layer overlay networks”. *IEEE J. Select. Areas Commun.*, 22(1):91–106, Jan. 2004.
- [17] V. N. Padmanabhan, H. J. Wang, and P. A. Chou. “Resilient peer-to-peer streaming”. *Microsoft, Tech. Rep. MSR-TR-2003-11*, Mar. 2003.

- [18] V. N. Padmanabhan, H. J. Wang, P. A. Chou, and K. Sripanidkulchai. “Distributing streaming media content using cooperative networking”. in *Proc. NOSSDAV’02*, May 2002.
- [19] K. Jain, L. Lovasz, and P. A. Chou. “Building scalable and robust peer-to-peer overlay networks for broadcasting using network coding”. *Microsoft Research Technical Report MSR-TR-2004-135*, Dec. 2004.
- [20] S. Accendanski, S. Deb, M. Medard, and R. Koetter. “How good is random linear coding based distributed networked storage?”. in *Proc. 1st Workshop on Network Coding, WiOpt 2005, Riva del Garda, Italy*, Apr. 2005.
- [21] R. Ahlswede, N. Cai, S.-Y. R. Li and R. W. Yeung. “Network information flow”. *IEEE Trans. on Information Theory*, 2000.
- [22] S.-Y. R. Li, R. W. Yeung, and N. Cai. “Linear network coding”. *IEEE Trans. on Information Theory*, 2003.
- [23] R. Koetter, M. Medard. “An Algebraic Approach to Network Coding”. *IEEE Trans. on Networking*, 2003.
- [24] D. Qiu and R. Srikant. “Modeling and Performance Analysis of BitTorrent-Like Peer-to-Peer Netowks”. In *Proc. of SIGCOMM04, Portland, OR*, Aug. 30 - Sep. 3 2004.
- [25] Z. Ge, D. R. Figueiredo, S. Jaiswal, J. Kurose, and D. Towsley. “Modeling peer-peer file sharing systems”. In *Article of IEEE INFOCOM*, 2003.
- [26] F. Clevenot and P. Nain. “A Simple Fluid Model for the Analysis of the Squirrel Peer-to-Peer Caching System”. In *Article of IEEE INFOCOM*, 2004.
- [27] Y. Wu, Y. C. Hu, J. Li, and P. A. Chou. “The Delay Region for P2P File Transfer”. in *International Symposium of Information Theory 2009, Seoul Korea*, July 2009.
- [28] J. Pouwelse, P. Garbacki, J. Wang, A. Bakker, J. Yang, A. Iosup, D. Epema, M. Rein- ders, M. van Steen, and H. Sips. “Tribler: A social-based Peer-to-Peer system”. *The 5th International Workshop on Peer-to-Peer Systems*, 2006.

- [29] S. Boyd and L. Vandenberghe. *Convex Optimization*. Cambridge Univ. Press, 2004.
- [30] D.J.C. MacKay. “Fountain codes”. in *IEEE Proc.-Commun.*, (6), 2005.
- [31] M. Luby. “LT codes”. in *43rd Annual IEEE Symposium on Foundations of Computer Science*, pages 271–282, 2002.
- [32] A. Shokrollahi. “Raptor codes”. “*Technical report, Laboratoire d’algorithmique, École Polytechnique Fédérale de Lausanne, Lausanne, Switzerland*”, 2003, Available from algo.epfl.ch/.
- [33] T. Courtade and R. D. Wesel. “A deterministic approach to rate-compatible fountain communication”. *IEEE Information Theory and Applications*, 2010.